



BHT 320°-350°

50

2000 , 300° 350° 95-

, 280° ,

2000

350°

2015



350°

BHT 320°-350°C 2025

AISI 52100

4xC5

BHT 320°-350° (51100)

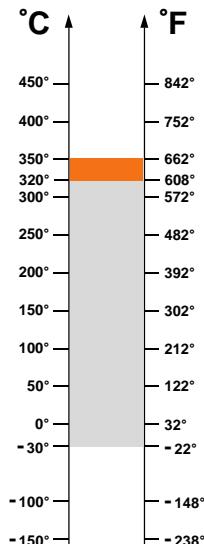

: -30° / 320°C

: 200° / 320°C

: 320° / 350°C

	(B)	(D)	(D1)	(W)				, kN 350°C	, kN 20°C
51100 BHT 320°-350°	10	24	11	9	20	100	10,55	15,3	
51101 BHT 320°-350°	12	26	13	9	20	100	11,45	16,6	
51102 BHT 320°-350°	15	28	16	9	20	100	11,59	16,8	
51103 BHT 320°-350°	17	30	18	9	30	100	11,86	17,2	
51104 BHT 320°-350°	20	35	21	9	40	100	15,72	22,8	
51105 BHT 320°-350°	25	42	26	10	60	100	21,72	31,5	
51106 BHT 320°-350°	30	47	32	11	60	100	24,83	36,0	
51107 BHT 320°-350°	35	52	37	11	80	100	27,93	40,5	
51108 BHT 320°-350°	40	60	42	13	120	100	37,93	55,0	
51109 BHT 320°-350°	45	65	47	14	140	100	42,06	61,0	
51110 BHT 320°-350°	50	70	52	14	160	100	46,90	68,0	
51111 BHT 320°-350°	55	78	57	16	230	100	58,62	85,0	
51112 BHT 320°-350°	60	85	62	17	300	100	70,35	102	
51113 BHT 320°-350°	65	90	67	18	330	100	75,17	109	
51114 BHT 320°-350°	70	95	72	18	350	100	76,55	111	
51115 BHT 320°-350°	75	100	77	19	400	100	100,0	145	