

## Radial grippers HGRT, heavy-duty

**FESTO**



## Key features

### At a glance


- Sturdy and precise kinematics for maximum torque resistance and long service life
- The plain-bearing guide is virtually backlash-free thanks to the ground-in gripper jaws
- Systematic use of high-performance and lightweight materials
- The force generated by the linear motion is translated into the gripper jaw movement via a slotted guide on the piston rod.  
This also guarantees synchronous movement of the gripper jaws
- The opening angle of the gripper jaws is freely adjustable up to max. 90° per gripper finger. This prevents the grippers jaws from opening too far and colliding
- Can be used as a double-acting or single-acting gripper
- Compression spring for supplementing or retaining the gripping forces
- Suitable for external and internal gripping
- Wide range of options for mounting on drives

### Flexible stroke limitation



On delivery, the gripper has a fixed stop that enables an opening angle of 180°. With the stroke reducing kit HGRT-HR, which can be ordered as an accessory, the opening angle can be reduced by using an adjustment screw. This is an easy way of converting the radial gripper into an angle gripper.

### Other ports

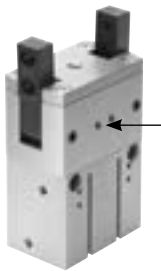

#### For sealing air

Compressed air flows past the gripper jaws when sealing air (max. 0.5 bar) is connected. This prevents, for example, dust particles from entering the gripper jaw guide.

#### For lubrication nipple

The ports can also be used to re-lubricate the guide.

### Position sensing/force control

#### With position transmitter SMAT-8M



Analogue position feedback possible

- Analogue output
  - 0 ... 10 V
  - 4 ... 20 mA

#### With proportional pressure regulator VPPM



Infinite adjustment of the gripping force possible

- Setpoint value input
  - 0 ... 10 V
  - 4 ... 20 mA

#### With proximity sensor SMT-8G/-10G




Detecting multiple positions:

- Open
- Closed
- Workpiece gripped


## Key features

### Supply ports

Direct

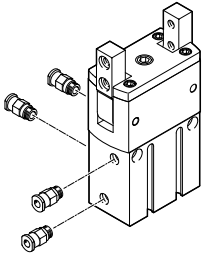

Via adapter plate

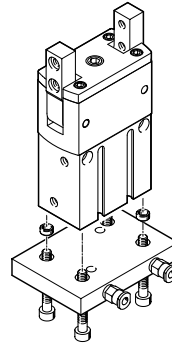


### Note

Engineering software  
for gripper selection  
→ [www.festo.com](http://www.festo.com)


### Mounting options

Direct mounting

At the side

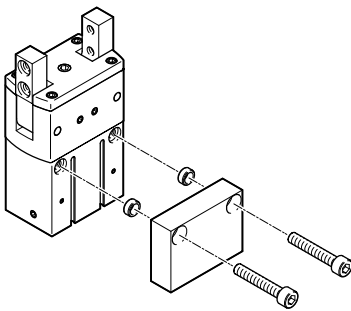


On the front

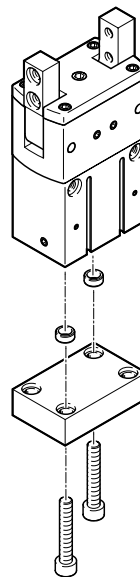


### Note


Radial grippers are not designed for  
the following sample applications:

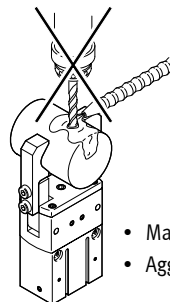

- Machining
- Aggressive media

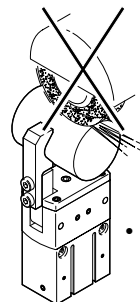

- Grinding dust

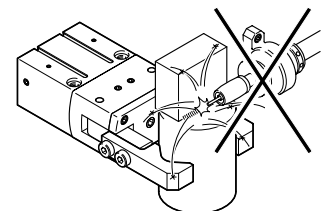

- Welding spatter

Type codes

001	Series
<b>HGRT</b>	Radial gripper


002	Size
<b>16</b>	16
<b>20</b>	20
<b>25</b>	25
<b>32</b>	32
<b>40</b>	40
<b>50</b>	50

003	Position sensing
<b>A</b>	For proximity sensor


004	Gripping force backup
	None
<b>G2</b>	N/O contact

## Peripherals overview


### Peripherals overview

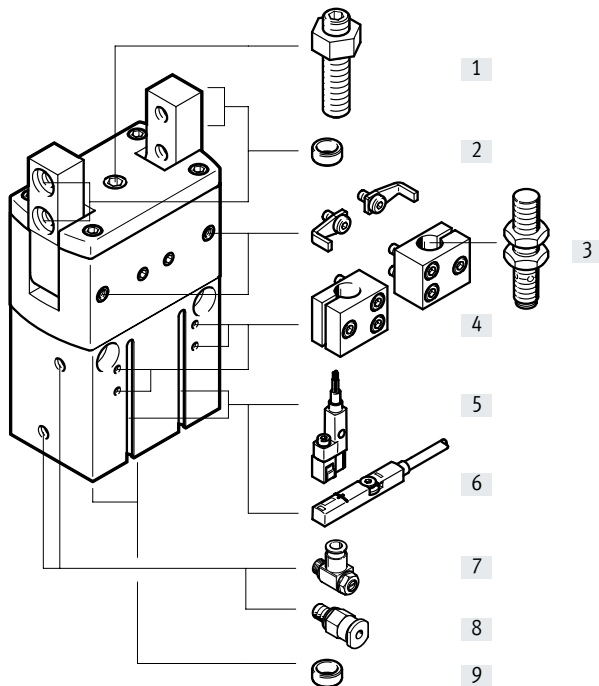

### System product for handling and assembly technology

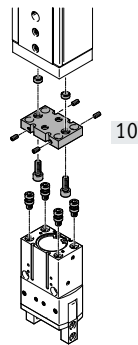

### Proportional-pressure regulator VPPM




Accessories			
Type	Size	Description	→ Page/Internet
[1] Stroke reducing kit HGRT-HR	16 ... 50	For adjusting the opening angle	19
[2] Centring sleeve ZBH	16 ... 50	<ul style="list-style-type: none"> <li>For centring when attaching gripper fingers</li> <li>4 included in the scope of delivery of the gripper</li> </ul>	20
[3] Proximity sensor SIEN	16 ... 50	For sensing the piston position	21
[4] Sensor bracket DASI	16 ... 50	<ul style="list-style-type: none"> <li>For mounting the proximity sensors SIEN on the gripper</li> <li>Switch lugs included in the scope of delivery of the sensor bracket</li> </ul>	19
[5] Proximity sensor SMT-8G/-10G	16 ... 50	<ul style="list-style-type: none"> <li>For sensing the piston position</li> <li>Proximity sensor does not project past the housing at the bottom</li> </ul>	20
[6] Position transmitter SMAT-8M	40	Continuously senses the position of the piston. It has an analogue output with an output signal relative to the piston position.	21
Position transmitter SDAT	40, 50		
[7] One-way flow control valve GRLA	16 ... 50	For speed regulation	grla
[8] Push-in fitting QS	16 ... 50	For connecting compressed air tubing with standard O.D.	qs
[9] Centring sleeve ZBH	16 ... 50	For centring when attaching to a drive or plate	20
[10] Adapter kit DHAA, HAPG	16 ... 50	Connecting plate between drive and gripper	17
[11] Proportional-pressure regulator VPPM	16 ... 50	For infinite adjustment of the gripping force	vppm

# Radial grippers HGRT, heavy-duty

## Data sheet

-  Size  
12 ... 50 mm
-  Opening angle  
180°

Double-acting



Single-acting or with gripping force retention



### General technical data

Size	16	20	25	32	40	50
Design	Force-guided motion sequence					
Mode of operation	Double-acting					
Gripper function	Radial					
Number of gripper jaws	2					
Max. opening angle [°]	180					
Pneumatic connection	M3	M5	M5	M5	G1/8	G1/8
Repetition accuracy <sup>1)</sup> [mm]	≤ 0.02					
Max. interchangeability [mm]	≤ 0.2					
Max. gripper jaw backlash <sup>2)</sup> [mm]	≤ 0.1					
Max. gripper jaw angular backlash <sup>3)</sup> [°]	≤ 0.1					
Max. permitted operating frequency [Hz]	≤ 3				≤ 2	
Rotational symmetry [mm]	≤ ∅ 0.2					
Position sensing	Via proximity sensor				Position transmitter	
Type of mounting	Via female thread and centring sleeve					
Mounting position	Any					
Product weight						
HGRT...-A [g]	130	290	540	840	1580	3100
HGRT...-A-G2 [g]	150	320	610	940	1770	3500

- 1) Under constant exposure to operating conditions, end-position drift occurs in the direction of movement of the gripper jaws, at 100 consecutive strokes
- 2) Perpendicular to the direction of motion of the gripper jaws
- 3) Preloaded, backlash-free ball guide

### Operating and environmental conditions


Operating pressure		
HGRT...-A [bar]		3 ... 8
HGRT...-A-G2 [bar]		4 ... 8
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation possible (in which case lubricated operation will always be required)	
Ambient temperature <sup>1)</sup> [°C]	+5 ... +60	
Corrosion resistance class CRC <sup>2)</sup>	1	

- 1) Note operating range of proximity sensors
- 2) Corrosion resistance class CRC 2 to Festo standard FN 940070  
Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

## Data sheet

## Materials


## Sectional view

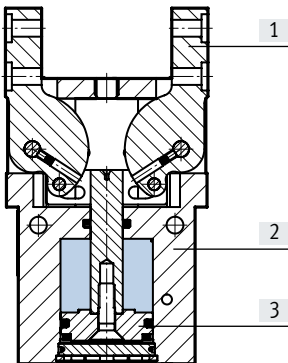

## Radial gripper

[1] Gripper jaws	Hardened steel
[2] Housing	Smooth anodised aluminium
[3] Piston	Anodised aluminium
- Seals	Polyurethane, NBR
- Note on materials	Free of copper and PTFE
	RoHS-compliant


## Total gripping torque at 6 bar



The gripping torque is not constant across the opening angle  
→ page 12

Size		16	20	25	32	40	50
Opening	[Ncm]	188	588	1348	2024	3892	8424
Closing	[Ncm]	158	516	1208	1856	3526	7754

## Static characteristic load values at the gripper jaws

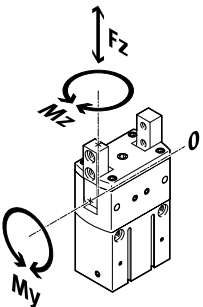


The indicated permissible forces and torques apply to a single gripper jaw. The indicated values include the lever arm, additional applied loads caused by the workpiece or external gripper fingers, as well as forces which occur during movement.

The zero coordinate line (gripper jaw guide) must be taken into consideration when calculating torques.

Size		16	20	25	32	40	50
Max. permissible force $F_z$	[N]	50	100	180	280	400	1200
Max. permissible torque $M_y$	[Nm]	3.9	6.2	10	13.5	17.5	35
Max. permissible torque $M_z$	[Nm]	0.3	0.5	1	1.3	1.6	10

## Data sheet


### Mass moment of inertia [kgm<sup>2</sup>x10<sup>-4</sup>]



Mass moment of inertia of the radial gripper in relation to the central axis, without external gripper fingers, with no load.

Size	16	20	25	32	40	50
HGRT...-A	0.191	0.74	2.1	4.62	13.87	43.39
HGRT...-A-G2	0.21	0.81	2.33	5.03	15.26	47.70

### Opening and closing times [ms] at 6 bar



The indicated opening and closing times [ms] have been measured at room temperature and 6 bar operating pressure with a vertically mounted gripper and without additional gripper fingers.

The grippers must be throttled for greater applied loads. Opening and closing times must then be adjusted accordingly.


Size		16	20	25	32	40	50
<b>Without external gripper fingers</b>							
HGRT...-A	Opening	246	280	309	359	283	350
	Closing	293	308	343	403	320	403
HGRT...-A-G2	Opening	233	372	443	503	370	490
	Closing	185	295	301	337	270	355




Data sheet

Permissible mass moment of inertia  $J$  with external gripper fingers as a function of opening and closing times  $t$  at 6 bar


HGRT-16

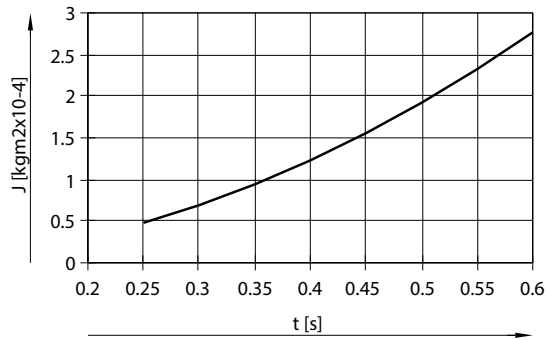


HGRT-20

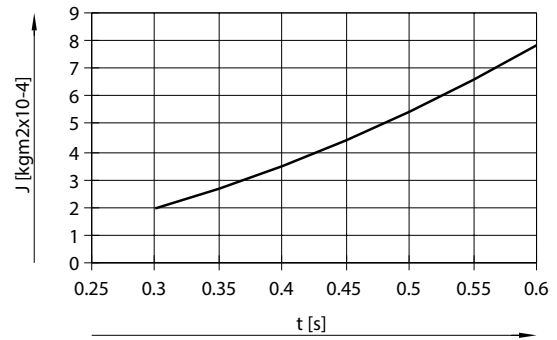


HGRT-25

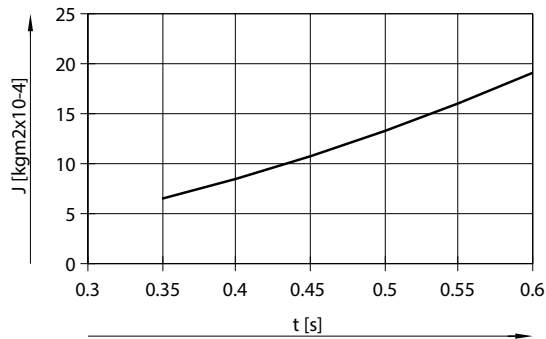


HGRT-32

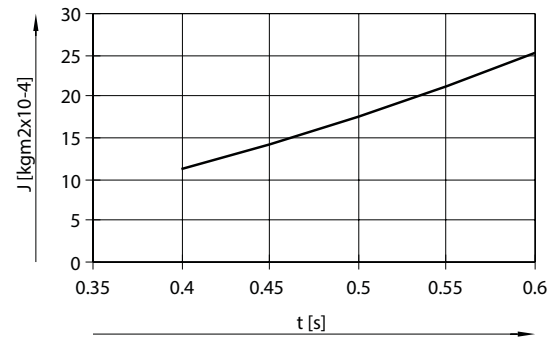

HGRT-40

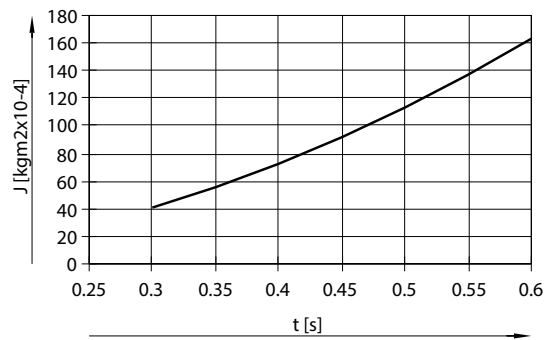


HGRT-50

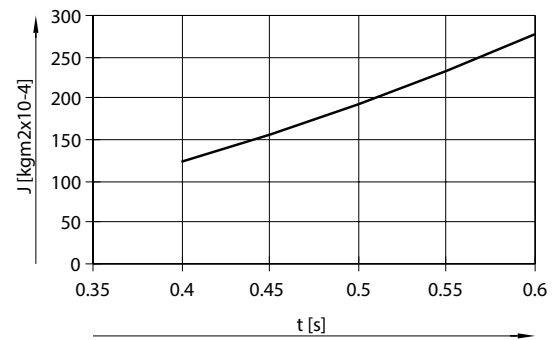

Data sheet


Gripping force  $F_H$  per gripper jaw as a function of operating pressure and lever arm  $x$

Gripping forces as a function of the operating pressure and the lever arm can be determined for the size using the following graph.  
 The gripping torque is not constant across the opening angle → page 12




External gripping (closing)


HGRT-16

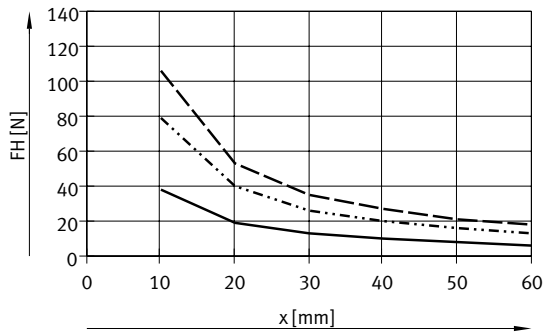


HGRT-20

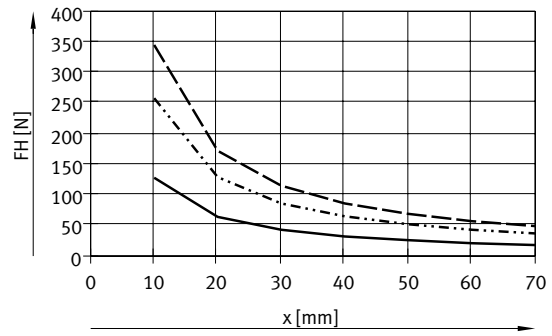


HGRT-25

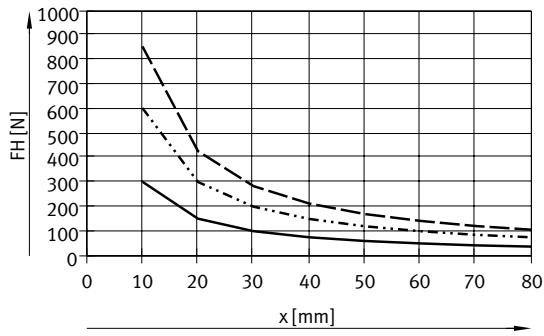


HGRT-32

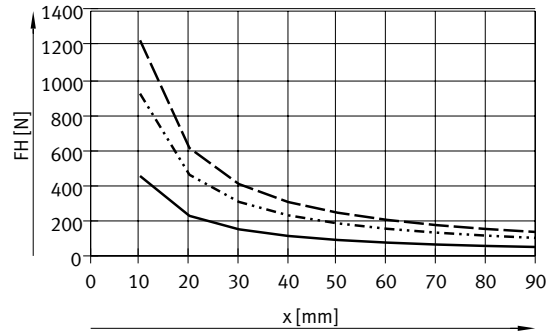

HGRT-40

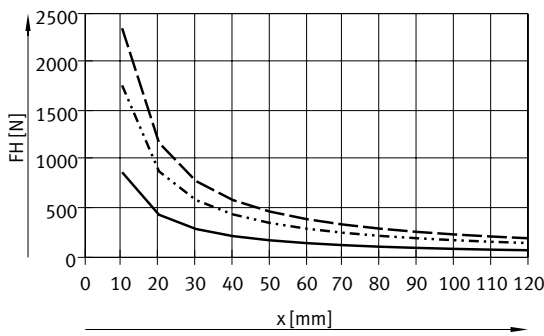

HGRT-50

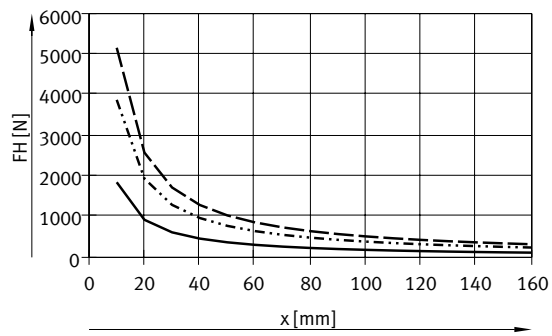


- 3 bar
- · - · 6 bar
- - - 8 bar

## Data sheet

### Gripping force $F_H$ per gripper jaw as a function of operating pressure and lever arm $x$


Gripping forces as a function of the operating pressure and the lever arm can be determined for the size using the following graph.

The gripping torque is not constant across the opening angle → page 12




### Internal gripping (opening)


HGRT-16

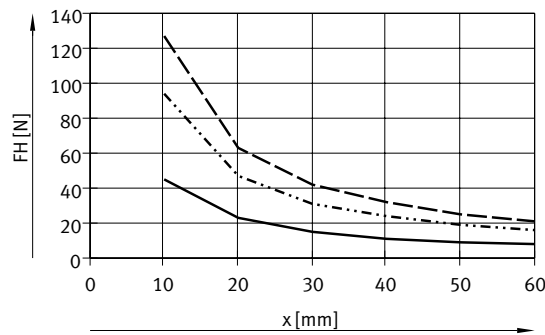


HGRT-20

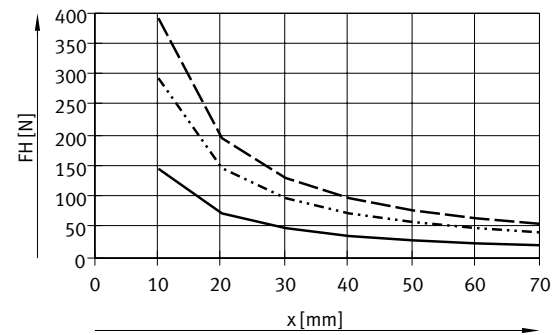


HGRT-25

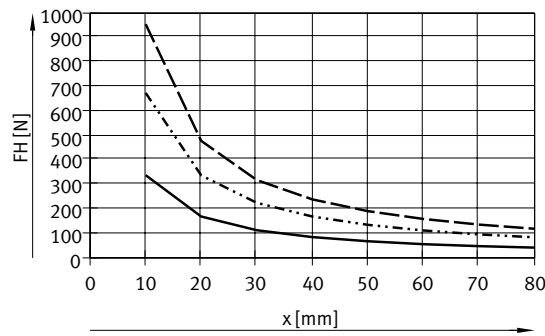


HGRT-32

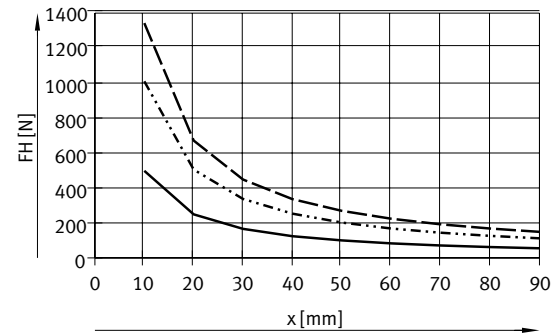

HGRT-40

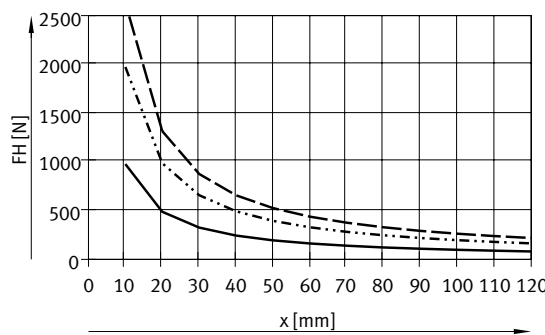

HGRT-50

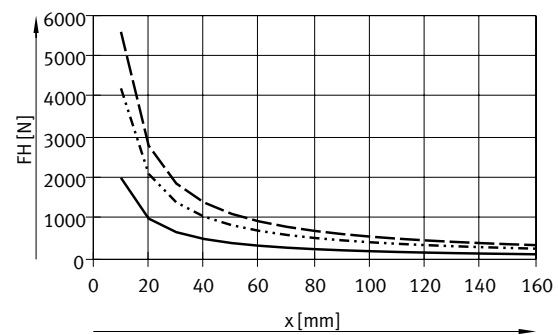

- 3 bar
- · - · 6 bar
- - - 8 bar


## Data sheet

### Gripping force $F_H$ per gripper jaw at 6 bar as a function of lever arm $x$ and eccentricity $a$ and $b$

The following formula must be used to calculate the lever arm  $x$  with eccentric gripping:

$$x = \sqrt{a^2 + b^2}$$

The gripping force  $F_H$  can be read from the graphs (→ page 10) using the calculated value  $x$ .

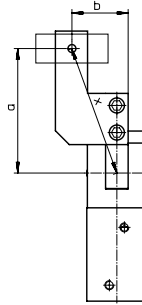

### Calculation example

Given:

Distance  $a = 45$  mm

Distance  $b = 40$  mm

To be calculated:



The gripping force at 6 bar with a HGRT-40, used as an external gripper

Procedure: Calculating the lever arm  $x$

$$x = \sqrt{45^2 + 40^2}$$

$$x = 60$$
 mm


The graph (→ page 10) gives a value for the gripping force  $F_H = 300$  N.

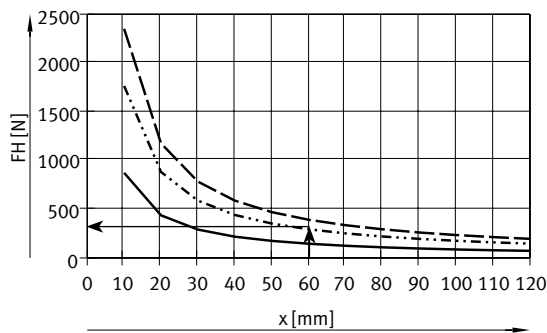

### Torque curve $M$ as a function of opening angle $\alpha$

The drive principle of the gripper jaws means that the torque is not constant across the opening angle. The percentage of torque available in each case can be determined from the graph.


Opening angle of  $0^\circ$  means: parallel gripper jaw position

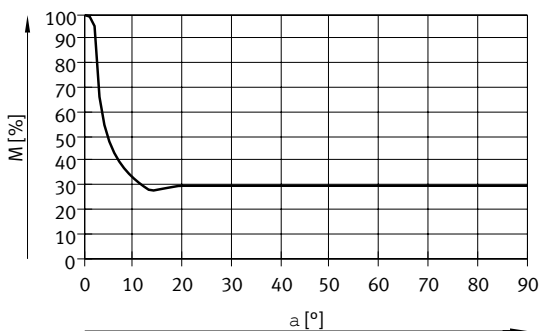

Data sheet


Spring torque  $M_F$  as a function of opening angle  $\alpha$

HGRT-16 ... 25

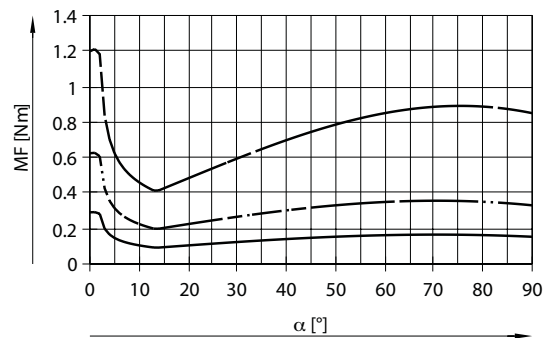

- HGRT-16-A-G2
- HGRT-20-A-G2
- - - HGRT-25-A-G2

HGRT-32 ... 40

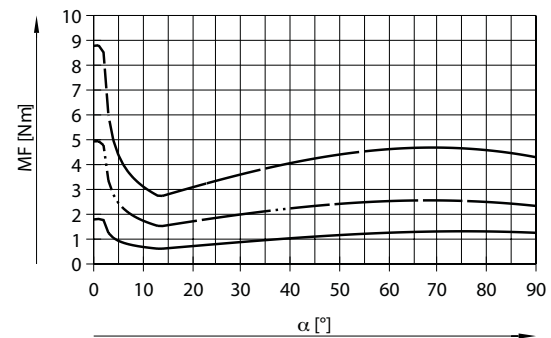

- HGRT-32-A-G2
- HGRT-40-A-G2
- - - HGRT-50-A-G2

Determining the actual gripping torques  $M_{Grtotal}$  for HGRT-...-G2 as a function of application

The radial gripper with integrated spring HGRT-...-G2 (closing gripping force retention) can be used as follows:

- Single-acting gripper
- Gripper with supplementary gripping force
- Gripper with gripping force retention

To calculate the available gripping torque  $M_{Grtotal}$  (per gripper jaw), the data from the graphs for the gripping force  $F_H$  (→ page 10), the torque curve  $M$  (→ page 12) and the spring torque  $M_F$  (→ page 13) must be combined accordingly.

$$M_{Gr} = F_H \cdot x \cdot M \text{ [%]}$$

- $M_{Gr}$  Gripping torque
- $F_H$  Gripping force
- $x$  Lever arm
- $M$  Torque curve

Application

Single-acting

- Gripping with spring force:  
 $M_{Grtotal} = M_F$
- Gripping with pressure force:  
 $M_{Grtotal} = M_{Gr} - M_F$

Supplementary gripping force

- Gripping with pressure and spring force:  
 $M_{Grtotal} = M_{Gr} + M_F$


Gripping force retention

- Gripping with spring force:  
 $M_{Grtotal} = M_F$


Data sheet

Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

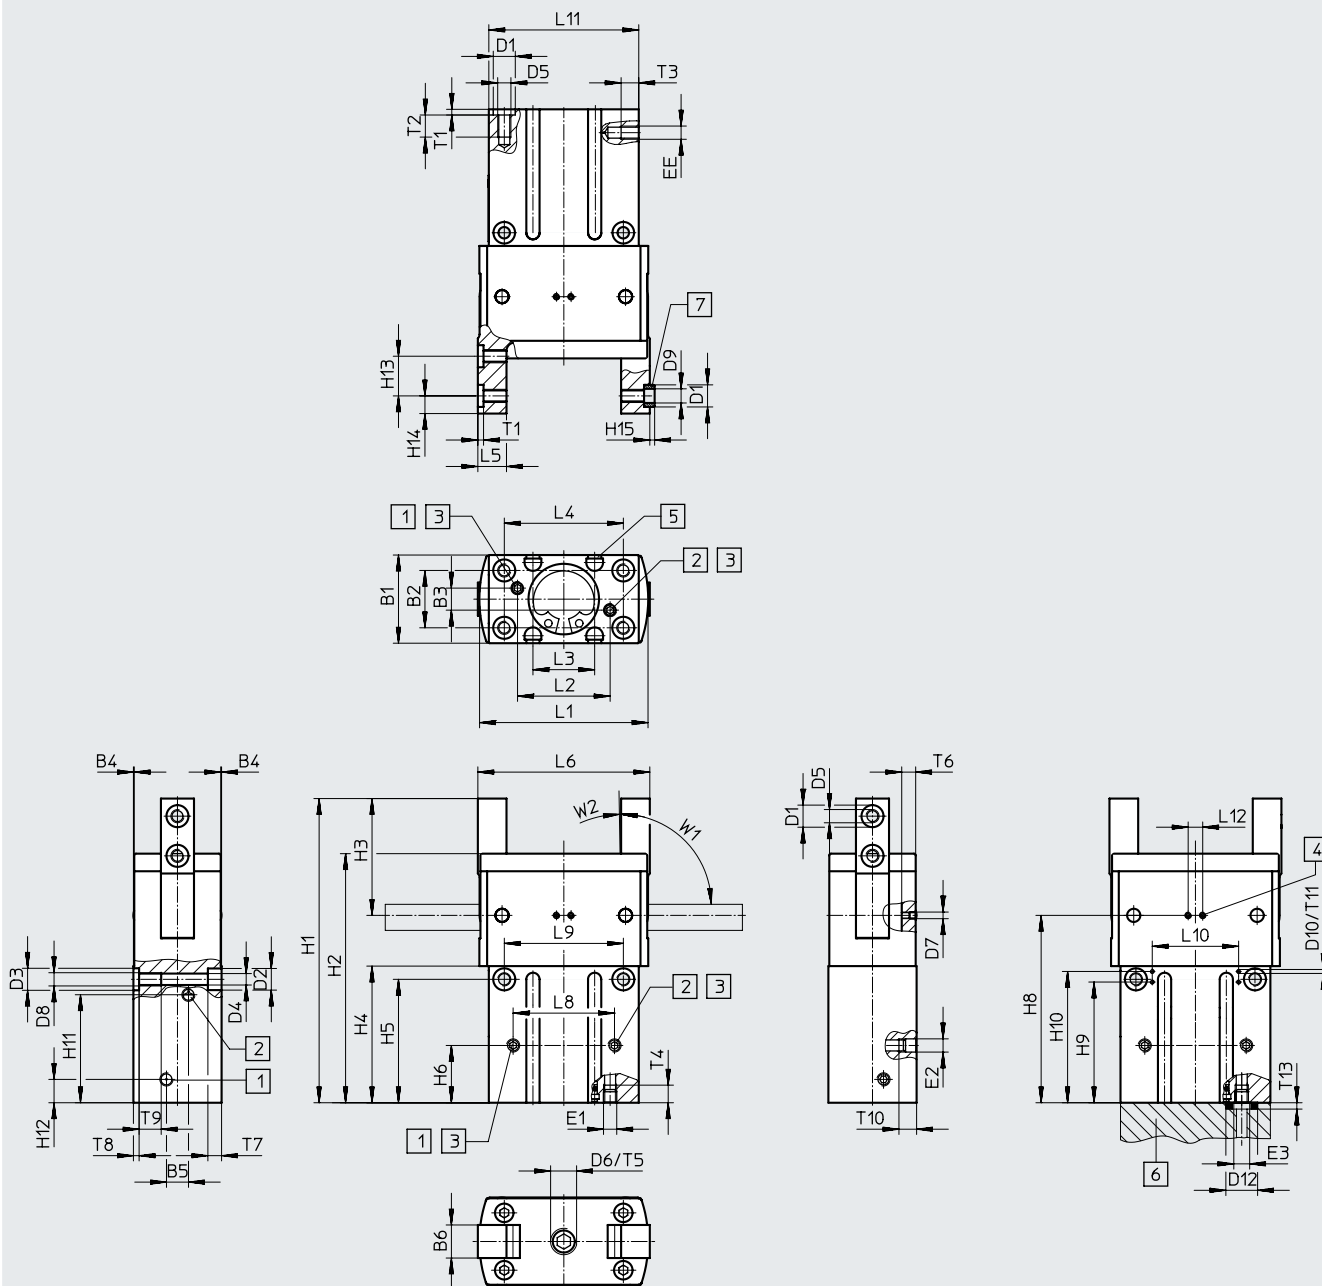

HGRT-32 ... 50

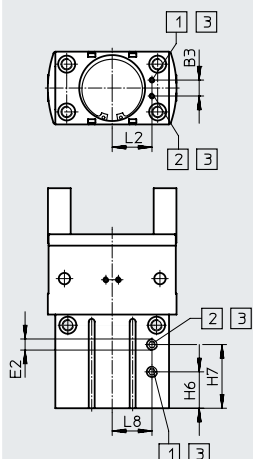

- [1] Supply port, opening
- [2] Supply port, closing
- [3] Alternative supply port, sealed on delivery
- [4] Sealing air, sealed on delivery
- [5] Sensor slot for proximity sensor
- [6] O-ring for radial gripper  
HGRT-16 ... 25:  $\varnothing 3 \times 1.5$   
HGRT-32 ... 50:  $\varnothing 5 \times 1.5$
- [7] Centring sleeves ZBH (4 included in the scope of delivery)

## Data sheet

Size	B1	B2 <sup>1)</sup>	B3	B4	B5	B6	D1 ∅	D2 ∅	D3 ∅	D4 ∅	D5	D6	D7	D8	D9 ∅
[mm]	±0.05		±0.1	+0.05	±0.1	±0.05	H8	+0.1	H8						
16	20	13	5	0.2	5	7.5	5	4.9	5	2.6	M3	M6	–	M3	3.2
20	28	18	6	0.2	6	10	7	7.4	7	4.2	M5	M6	M3	M5	5.3
25	35	23	7	0.2	7	12.5	9	9.4	9	5.1	M6	M8	M5	M6	6.4
32	40	27	10	0.2	10	14.5	9	9.4	9	5.1	M6	M8	M5	M6	6.4
40	50	33	11	0.2	11	18	12	10.4	12	6.8	M8	M8	M5	M8	10.3
50	64	42	14	0.2	14	22.5	15	13.5	15	8.5	M10	M12	M5	M10	12.4

Size	D10	D12	EE	E1	E2	E3	H1		H2		H3	H4		H5	
							±0.05	-G ±0.05	±0.05	-G ±0.05		±0.1	±0.1	-G ±0.1	±0.1
16	–	6	M3	M3	M3	M3	69	77.5	56.5	65	26.5	31	39.5	28	36.5
20	–	6	M5	M3	M3	M3	88.5	97.5	71	80	35.1	39	48	34.5	43.5
25	M3	6	M5	M3	M3	M3	109	120	88	99	42.5	48.3	59.3	42.5	53.5
32	M3	8	M5	M5	M5	M5	125	137	102	114	49	54.7	66.7	49	61
40	M3	8	G1/8	M5	G1/8	M5	154.6	172.6	122	140	63.6	65.5	83.5	58	76
50	M3	8	G1/8	M5	G1/8	M5	193.5	215.5	153	175	79.5	82.4	104.4	73	95


Size	H6		H7		H8		H9		H10		H11		H12	H13 <sup>1)</sup>
	±0.1	-G ±0.1	±0.1	-G ±0.1		-G	±0.1	-G ±0.1	±0.1	-G ±0.1	±0.1	-G ±0.1		
16	13	13	–	–	–	–	–	–	–	–	24.5	33	5.3	9
20	16	16	–	–	52.5	61.5	–	–	–	–	29	38	6	12
25	19.5	19.5	–	–	65.5	76.5	28	39	36	47	36	47	7.6	14
32	20	20	35.5	46.5	75.5	87.5	34.5	46.5	42.5	54.5	42.4	54.2	8.1	16
40	26	29	45	56.5	90	108	47	65	55	73	48	64.5	9.7	20
50	32	32	56	70	113	135	72	94	80	102	62	80	13.5	25

Size	H14 <sup>1)</sup>	H15	L1	L2	L3	L4 <sup>1)</sup>	L5	L6	L8	L9 <sup>1)</sup>	L10	L11	L12	T1
[mm]		-0.3	±0.05		+0.1		±0.05	±0.5	±0.1		±0.1	±0.1		+0.1
16	4	1.2	38.3	21±0.1	14	27	6.5	39	23	27	–	34	–	1.3
20	5	1.4	49.9	30±0.1	17	34	9	50.4	30	34	–	44	11	1.6
25	6	1.9	61.1	39±0.1	22	42	11	61.2	39	41	33	54	11	2.1
32	7	1.9	72.2	22.5 <sup>+0.1</sup>	24	51	12	72.2	22.5	48	41	64	11	2.1
40	9	2.4	90.3	28 <sup>+0.1</sup>	32	63	16.5	90.8	28	62	47	80	11	2.6
50	11	2.9	113.2	35 <sup>+0.1</sup>	36	80	20	113	35	78	59	100	11	3.1

Size	T2		T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	W1	W2
	min.	-G min.													
16	5	5	4	4	4	–	3.1	1.3	5	4	–	–	1.2	90	1
20	8.5	8	5	4	5	4.3	4.1	1.6	8	4	–	4	1.2	90	1
25	10	10	5	4.5	6	5.8	5.1	2.1	10	4.5	5.5	–	1.2	90	1
32	9.5	9.5	5	5	7	6.3	5.2	2.1	9.5	5	5.5	–	1.2	90	1
40	14.5	14.5	8.5	5	8	7.8	6.2	2.6	12.5	8.5	5.5	–	1.2	90	1
50	15	15	8.5	5	10	10.55	8.1	3.1	15	8.5	5.5	–	1.2	90	1

1) Tolerance for centring hole ±0.02 mm  
Tolerance for thread ±0.1 mm

Data sheet

Ordering data	Size	Double-acting without compression spring		Single-acting or with gripping force retention	
	[mm]	Part no.	Type	Closing Part no.	Type
		16	563904	HGRT-16-A	563905
	20	563906	HGRT-20-A	563907	HGRT-20-A-G2
	25	563908	HGRT-25-A	563909	HGRT-25-A-G2
	32	563910	HGRT-32-A	563911	HGRT-32-A-G2
	40	563912	HGRT-40-A	563913	HGRT-40-A-G2
	50	563914	HGRT-50-A	563915	HGRT-50-A-G2


Ordering data – Sets of wearing parts		
Size [mm]	Part no.	Type
16	1459481	HGRT-16
20	1459482	HGRT-20
25	1459483	HGRT-25
32	1459484	HGRT-32
40	1459485	HGRT-40
50	1459486	HGRT-50







## Accessories

Adapter kit  
DHAA

Material:  
Wrought aluminium alloy  
Free of copper and PTFE  
RoHS-compliant

**Note**

The kit includes the individual mounting interface as well as the necessary mounting material.

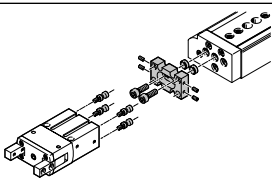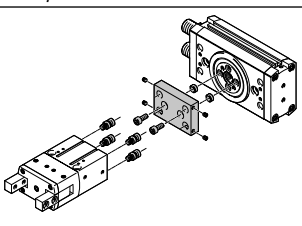Permissible drive/gripper combinations with adapter kit						Download CAD data → <a href="http://www.festo.com">www.festo.com</a>	
Combination	Actuator Size	Gripper Size	Mounting option		Adapter kit CRC <sup>1)</sup>	Part no.	Type
							
	<b>DGSL</b>	<b>HGRT</b>			2		
	8, 10	16	■	■		1273902	DHAA-G-G6-8-B11-16
	12, 16	16	■	■		1467524	DHAA-G-G6-12-B11-16
	12, 16	20	■	■		1278364	DHAA-G-G6-12-B11-20
	20, 25	25	■	■		1468307	DHAA-G-G6-20-B11-25
	25	32	■	■	1280494	DHAA-G-G6-25-B11-32	
	<b>DRRD</b>	<b>HGRT</b>			2		
	16	16	■	■		2185606	DHAA-G-Q11-16-B11-16
	20	20	■	■		2184467	DHAA-G-Q11-20-B11-20
	25	25	■	■		1741183	DHAA-G-Q11-25-B11-25
	25	32	■	■		1743177	DHAA-G-Q11-25-B11-32
	32	25	■	■		2184080	DHAA-G-Q11-32-B11-25
	32	32	■	■		2184322	DHAA-G-Q11-32-B11-32
	32	40	■	■		2184652	DHAA-G-Q11-32-B11-40
	35	40	■	■		2185436	DHAA-G-Q11-35-B11-40

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

## Accessories







**Adapter kit**  
DHAA, HAPG

Material:  
Wrought aluminium alloy  
Free of copper and PTFE  
RoHS-compliant



**Note**

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit							Download CAD data → <a href="http://www.festo.com">www.festo.com</a>	
Combination	Actuator Size	Gripper Size	Mounting option		Adapter kit CRC <sup>1)</sup>	Part no.	Type	
								
	HSP	HGRT			DHAA, HAPG			
	16	16	■	–		2	1274347	DHAA-G-H4-16-B11-16
							540882	HAPG-71-B
	25	16	■	–			1274347	DHAA-G-H4-16-B11-16
						540883	HAPG-72-B	
	HSW	HGRT			DHAA, HAPG			
	12, 16	16	■	–		2	1274347	DHAA-G-H4-16-B11-16
							540882	HAPG-71-B
	EGSL	HGRT			DHAA			
	45, 55	20	■	■		2	1278364	DHAA-G-G6-12-B11-20
	45, 55	25	■	■			1279418	DHAA-G-E8-45-B11-25
	75	25	■	■			1468307	DHAA-G-G6-20-B11-25
	75	32	■	■			1280494	DHAA-G-G6-25-B11-32
	ERMB	HGRT			DHAA			
	20	20	■	■		2	1465263	DHAA-G-Q5-20-B11-20
	25, 32	25	■	■			1279439	DHAA-G-Q5-25-B11-25
	25, 32	32	■	■			1468949	DHAA-G-Q5-25-B11-32

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.


## Accessories

### Stroke reducing kit HGRT-HR

Material:

Screw: Steel

Lock nut: Case-hardened steel

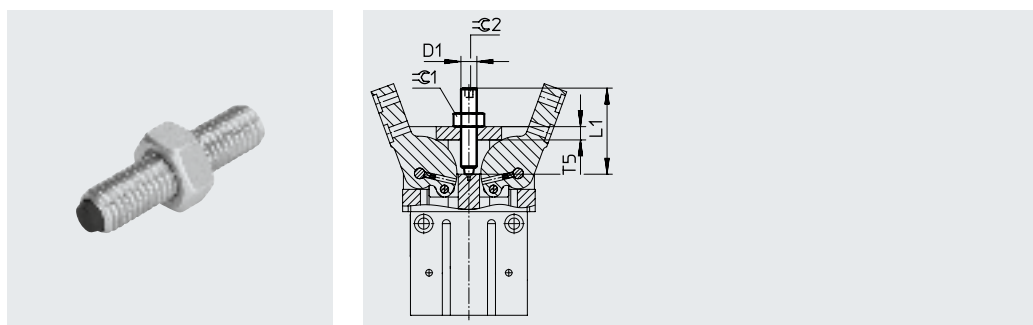

#### Dimensions and ordering data



For size [mm]	D1	L1	T5	⌀ 1	⌀ 2	Adjustable end-position range [mm]	Weight [g]	Part no.	Type
16	M6	26	4	10	3	20	7	564296	HGRT-HR-16
20	M6	31	5	10	3	25	9	564297	HGRT-HR-20
25	M8	36	6	13	4	30	18	564298	HGRT-HR-25
32	M8	41	7	13	4	35	20	564299	HGRT-HR-32
40	M8	51	8	13	4	45	24	564300	HGRT-HR-40
50	M12	61	10	19	6	50	66	564301	HGRT-HR-50

### Sensor bracket DASI

Material:

DASI-B10-25-S8: Polyamide

DASI-B10-40-S12: Aluminium

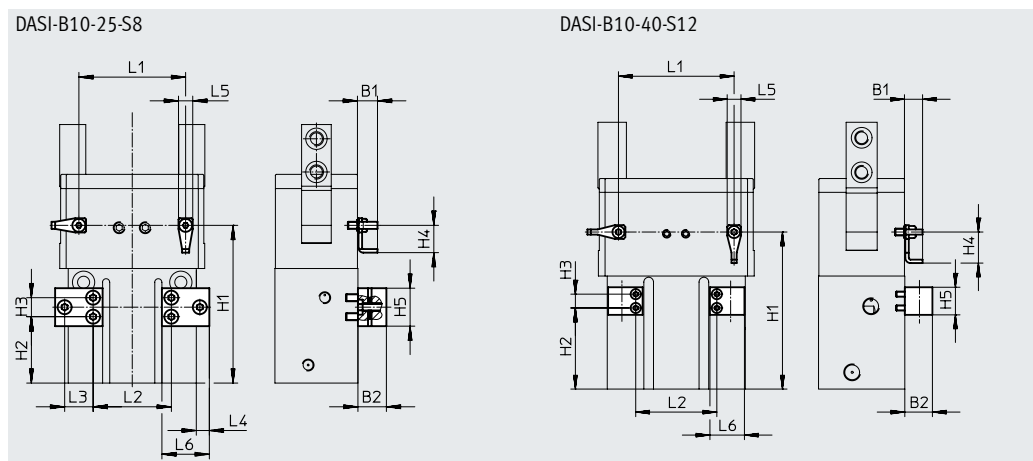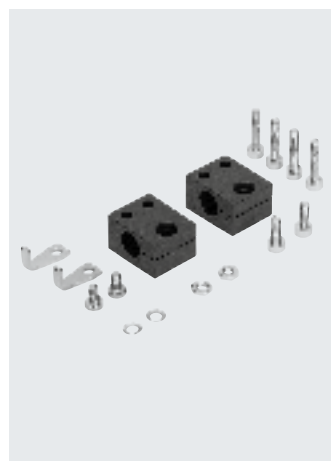


#### Dimensions and ordering data


For type [mm]	H1 ±0.02	H2 ±0.1	L1 ±0.01	L2
HGRT-25-A	66.5	28	45	33
HGRT-25-A-G2	77.5	39	45	33
HGRT-32-A	76	34.5	53	64
HGRT-32-A-G2	88	46.5	53	64
HGRT-40-A	91	47	67	47
HGRT-40-A-G2	109	65	67	47
HGRT-50-A	114	72	84	59
HGRT-50-A-G2	136	94	84	59


For size [mm]	B1	B2	H3 ±0.1	H4	H5	L3 ±0.1	L4	L5	L6 ±0.2	Weight [g]	Part no.	Type
25, 32	8.45	12	8	11.5	16	12	5.5	6	20	39	564311	DASI-B10-25-S8
40, 50	10.5	16	8	18	16	-	-	8	20	18	564312	DASI-B10-40-S12



## Accessories

Ordering data – Centring sleeves		Data sheets → Internet: zbh		
	For size [mm]	Part no.	Type	PU <sup>1)</sup>
	16	189652	ZBH-5	10
	20	186717	ZBH-7	
	25, 32	8137184	ZBH-9-B	
	40	8137185	ZBH-12-B	
	50	191409	ZBH-15	

1) Packaging unit

Proximity sensor for size 16 ... 32		Data sheets → Internet: smt				
Ordering data – Proximity sensor for C-slot, magneto-resistive						
	Type of mounting	Electrical connection, outlet direction of connection	Switching output	Cable length [m]	Part no.	Type
<b>N/O contact</b>						
	Inserted in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547862	SMT-10G-PS-24V-E-2.5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	547863	SMT-10G-PS-24V-E-0.3Q-M8D
		Cable, 3-wire, lateral	NPN	2.5	8065030	SMT-10G-NS-24V-E-2.5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	8065029	SMT-10G-NS-24V-E-0.3Q-M8D



Proximity sensor for size 40 ... 50		Data sheets → Internet: smt				
Ordering data – Proximity sensor for T-slot, magneto-resistive						
	Type of mounting	Electrical connection, outlet direction of connection	Switching output	Cable length [m]	Part no.	Type
<b>N/O contact</b>						
	Inserted in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547859	SMT-8G-PS-24V-E-2.5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	547860	SMT-8G-PS-24V-E-0.3Q-M8D
		Cable, 3-wire, lateral	NPN	2.5	8065028	SMT-8G-NS-24V-E-2.5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	8065027	SMT-8G-NS-24V-E-0.3Q-M8D



Ordering data – Connecting cables		Data sheets → Internet: nebu			
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3


## Accessories



## Position transmitter

The position transmitter continuously senses the position of the piston. It has an analogue output with an output signal relative to the piston position.

Ordering data – Position transmitter for T-slot								Data sheets → Internet: position transmitter	
	For Ø	Position measuring range	Analogue output		Type of mounting	Electrical connection	Cable length [m]	Part no.	Type
			[V]	[mA]					
	40	0 ... 40	0 ... 10	–	Inserted in the slot from above	Plug M8x1, 4-pin, in-line	0.3	553744	SMAT-8M-U-E-0.3-M8D
	40, 50	0 ... 50	–	4 ... 20	Inserted in the slot from above	Plug M8x1, 4-pin, in-line	0.3	1531265	SDAT-MHS-M50-1L-SA-E-0.3-M8

Ordering data – Connecting cables					Data sheets → Internet: nebu
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Type
	Straight socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541342	NEBU-M8G4-K-2.5-LE4
			5	541343	NEBU-M8G4-K-5-LE4
	Angled socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541344	NEBU-M8W4-K-2.5-LE4
			5	541345	NEBU-M8W4-K-5-LE4

Ordering data – Proximity sensors, inductive, for sensor bracket DASI					Data sheets → Internet: sien
	Thread	Contact	Connection	Part no.	Type
	<b>For DASI-B10-25-S8</b>				
	M8	N/O contact	Cable, 2.5 m	150386	SIEN-M8B-PS-K-L
			Plug	150387	SIEN-M8B-PS-S-L
	<b>For DASI-B10-40-S12</b>				
M12	N/O contact	Cable, 2.5 m	150402	SIEN-M12B-PS-K-L	
		Plug	150403	SIEN-M12B-PS-S-L	

Ordering data – Connecting cables					Data sheets → Internet: nebu
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part no.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3