




Тип 3F



Тип 8F



Тип 8

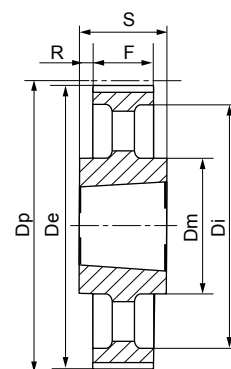

Тип 7A

HTD® 5M-15

Характери- стики		Обозначение	КОД	Тип шкива	Типо- размер реборды	Втулка тапербуш	Максимальное отверстие втулки тапербуш, мм	Dp, мм	De, мм	Df, мм	Dm, мм	Di, мм	F, мм	S, мм	R, мм
Сталь C45 E – UNI EN 10083–1	С реборами	34 5M 15	0515034	3F	F21	1008	25	54,11	52,97	57	–	–	22	22	–
		36 5M 15	0515036	3F	F22	1108	25	57,30	56,15	60	–	–	22	22	–
		38 5M 15	0515038	3F	F25	1108	25	60,48	59,34	66	–	–	22	22	–
		40 5M 15	0515040	3F	F26	1108	25	63,66	62,52	70	–	–	22	22	–
		44 5M 15	0515044	3F	F27	1108	25	70,03	68,89	75	–	–	22	22	–
		48 5M 15	0515048	8F	F29	1210	32	76,39	75,25	83	59	–	22	25	3
		56 5M 15	0515056	8F	F32	1210	32	89,13	87,98	93	70	–	22	25	3
		64 5M 15	0515064	8F	F35	1210	32	101,86	100,72	106	80	–	22	25	3
	Без реборд	72 5M 15	0515072	8	–	1610	42	114,59	113,45	–	92	–	22	25	3
		80 5M 15	0515080	8	–	1610	42	127,32	126,18	–	92	–	22	25	3
		90 5M 15	0515090	8	–	1610	42	143,24	142,10	–	92	–	22	25	3
		112 5M 15	0515112	8	–	2012	50	178,25	177,11	–	110	–	20	32	12
		136 5M 15	0515136	7A	–	2012	50	216,45	215,31	–	110	199	20	32	6