


UCECH2 Serie normale - Standard duty

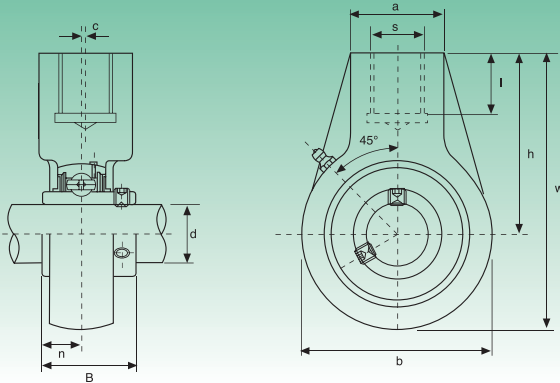

Tipo Type	Dimensioni - Dimensions										Coefficienti di carico (N) Load ratings (N)		Cuscinetto Bearing	Supporto Housing	Peso Weight
	d	h	w	b	c	a	l	B	n	S	Dinamico C Dynamic C	Statico C ₀ Static C ₀			
	mm/inch														kg
UCECH201	12	64	96	64	0	40	19	31	12,7				UC201		0,73
UCECH201-8	½	233/64	325/32	233/64	0	137/64	¾	1,2205	0,500	G¾	12160	6318	UC201-8	ECH204	0,72
UCECH202	15	64	96	64	0	40	19	31	12,7				UC202		0,72
UCECH202-9	9/16	233/64	325/32	233/64	0	137/64	¾	1,2205	0,500	G¾	12160	6318	UC202-9	ECH204	0,72
UCECH202-10	5/8												UC202-10		0,72
UCECH203	17	64	96	64	0	40	19	31	12,7				UC203		0,71
UCECH203-11	11/16	233/64	325/32	233/64	0	137/64	¾	1,2205	0,500	G¾	12160	6318	UC203-11	ECH204	0,70
UCECH204	20	64	96	64	0	40	19	31	12,7				UC204		0,69
UCECH204-12	¾	233/64	325/32	233/64	0	137/64	¾	1,2205	0,500	G¾	12160	6318	UC204-12	ECH204	0,69
UCECH205	25	64	103	78	0	40	19	34,1	14,3				UC205		0,83
UCECH205-13	13/16												UC205-13		0,87
UCECH205-14	7/8	233/64	41/16	35/64	0	137/64	¾	1,3425	0,563	G¾	13300	7457	UC205-14	ECH205	0,86
UCECH205-15	15/16												UC205-15		0,84
UCECH205-16	1												UC205-16		0,83
UCECH206	30	64	103	78	0	40	19	38,1	15,9				UC206		0,83
UCECH206-17	11/16												UC206-17		0,86
UCECH206-18	11/8	233/64	41/16	35/64	0	137/64	¾	1,5000	0,626	G¾	18525	10735	UC206-18	ECH206	0,85
UCECH206-19	13/16												UC206-19		0,83
UCECH206-20	1¼												UC206-20		0,82
UCECH207	35	70	116	92	0	40	19	42,9	17,5				UC207		1,16
UCECH207-20	1¼												UC207-20		1,22
UCECH207-21	15/16	2¾	49/16	35/8	0	137/64	¾	1,6890	0,689	G¾	24415	14630	UC207-21	ECH207	1,19
UCECH207-22	13/8												UC207-22		1,16
UCECH207-23	17/16												UC207-23		1,13
UCECH208	40	73	121	96	2	40	19	49,2	19				UC208		1,32
UCECH208-24	1½	27/8	449/64	325/32	5/64	137/64	¾	1,9370	0,748	G¾	27645	16910	UC208-24	ECH208	1,36
UCECH208-25	19/16												UC208-25		1,33
UCECH209	45	82	136	108	5	48	21	49,2	19				UC209		1,92
UCECH209-26	15/8												UC209-26		2,02
UCECH209-27	111/16	315/64	523/64	4¼	13/64	157/64	53/64	1,9370	0,748	G1	32395	20235	UC209-27	ECH209	1,98
UCECH209-28	1¾												UC209-28		1,94
UCECH210	50	83	142	118	5	48	21	51,6	19				UC210		1,90
UCECH210-29	113/16												UC210-29		2,02
UCECH210-30	17/8	317/64	519/32	441/64	13/64	157/64	77/8 83/64	2,0315	0,748	G1	33345	22135	UC210-30	ECH210	1,97
UCECH210-31	115/16												UC210-31		1,92
UCECH210-32	2												UC210-32		1,88
UCECH211	55	87	150	126	7	60	25	55,6	22,2				UC211		2,61
UCECH211-32	2												UC211-32		2,76
UCECH211-33	21/16	327/64	529/32	461/64	9/32	223/64	63/64	2,1890	0,874	G1¼	41230	27930	UC211-33	ECH211	2,70
UCECH211-34	21/8												UC211-34		2,65
UCECH211-35	23/16												UC211-35		2,59
UCECH212	60	102	173	142	9	60	28	65,1	25,4				UC212		3,54
UCECH212-36	2¼												UC212-36		3,67
UCECH212-37	25/16	41/64	613/16	519/32	23/64	223/64	17/64	2,5630	1,000	G1¼	49780	34390	UC212-37	ECH212	3,59
UCECH212-38	23/8												UC212-38		3,52
UCECH212-39	27/16												UC212-39		3,45
UCECH213	65	117	200	166	9,5	70	32	65,1	25,4				UC213		5,80
UCECH213-40	2½	439/64	77/8	617/32	3/8	2¾	117/64	2,5630	1,000	G1½	54340	38095	UC213-40	ECH213	5,89
UCECH213-41	29/16												UC213-41		5,80
UCECH214	70	117	200	166	9,5	70	32	74,6	30,2				UC214		
UCECH214-42	25/8												UC214-42		
UCECH214-43	211/16	439/64	77/8	617/32	3/8	2¾	117/64	2,9370	1,189	G1½	59090	41895	UC214-43	ECH214	5,67
UCECH214-44	2¾												UC214-44		
UCECH215	75	117	200	166	9,5	70	32	77,8	33,3				UC215		
UCECH215-45	213/16												UC215-45		
UCECH215-46	27/8	439/64	731/32	617/32	3/8	2¾	117/64	3,0630	1,311	G1½	64030	45885	UC215-46	ECH215	5,58
UCECH215-47	215/16												UC215-47		
UCECH215-48	3												UC215-48		

Disponibile in acciaio inox Supporto: AISI 304 - Cuscinetto: AISI 440C o 420C - Available stainless steel Housing: AISI 304 - Bearing: AISI 440C or 420C
Disponibile su richiesta con cuscinetto SA (SAECH) - Available under request with SA bearing (SAECH)

S - Su richiesta disponibili con filetto metrico, in pollici e gas
S - Under request available with metric, inches and gas thread