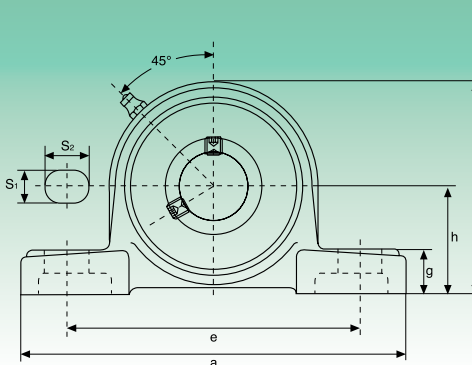

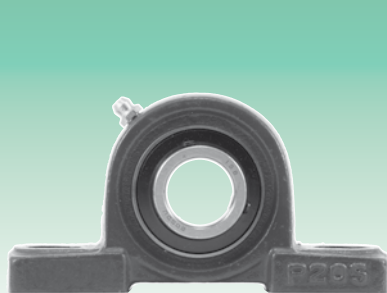


Typ Тун	Abmessungen - Размеры												Bef.Bolz. Креп. винт	Tragzahlen (N) Коэффициент нагрузки (Н)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес	
	d	h	a	e	b	S ₁	S ₂	g	w	t	B ₁	n		dynamisch C Динамическая C	statisch C ₀ Статическая C ₀				
	mm/Zoll - мм/дюйм													mm/Zoll - мм/дюйм				kg	
UCP201	12	30,2	127	95	38	13	19	14	62	44,5	31	12,7	M10			UC201		0,69	
UCP201-8	¾	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8		12160	6318	UC201-8	P203	0,69
UCP202	15	30,2	127	95	38	13	19	14	62	44,5	31	12,7	M10			UC202		0,69	
UCP202-9	9/16	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8		12160	6318	UC202-9	P203	0,69
UCP202-10	5/8	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8			UC202-10		0,69	
UCP203	17	30,2	127	95	38	13	19	14	62	44,5	31	12,7	M10			UC203		0,68	
UCP203-11	11/16	13/16	5	3¾	1½	½	¾	9/16	27/16	1¾	1,2205	0,500	3/8		12160	6318	UC203-11	P203	0,67
UCP204	20	33,3	127	95	38	13	19	14	65	44,5	31	12,7	M10			UC204		0,66	
UCP204-12	¾	15/16	5	3¾	1½	½	¾	9/16	29/16	1¾	1,2205	0,500	3/8		12160	6318	UC204-12	P204	0,66
UCP205	25	36,5	140	105	38	13	19	15	71	48	34,1	14,3	M10			UC205		0,81	
UCP205-13	13/16															UC205-13		0,85	
UCP205-14	7/8	17/16	5½	41/8	1½	½	¾	19/32	225/32	157/64	1,3425	0,563	3/8		13300	7457	UC205-14	P205	0,83
UCP205-15	15/16															UC205-15		0,82	
UCP205-16	1															UC205-16		0,81	
UCP206	30	42,9	165	121	48	17	20	17	84	53	38,1	15,9	M14			UC206		1,24	
UCP206-17	11/16															UC206-17		1,27	
UCP206-18	11/8	111/16	6½	4¾	17/8	43/64	25/32	21/32	35/16	25/64	1,5000	0,626	½		18525	10735	UC206-18	P206	1,26
UCP206-19	13/16															UC206-19		1,24	
UCP206-20	1¼															UC206-20		1,23	
UCP207	35	47,6	167	127	48	17	20	18	93	59,5	42,9	17,5	M14			UC207		1,58	
UCP207-20	1¼															UC207-20		1,64	
UCP207-21	15/16	17/8	69/16	5	17/8	43/64	25/32	45/64	321/32	211/32	1,6890	0,689	½		24415	14630	UC207-21	P207	1,61
UCP207-22	13/8															UC207-22		1,58	
UCP207-23	17/16															UC207-23		1,55	
UCP208	40	49,2	184	137	54	17	20	18	100	69	49,2	19	M14			UC208		1,89	
UCP208-24	1½	115/16	7¼	513/32	21/8	43/64	25/32	45/64	315/16	223/32	1,9370	0,748	½		27645	16910	UC208-24	P208	1,93
UCP208-25	19/16															UC208-25		1,90	
UCP209	45	54,0	190	146	54	17	20	20	106	69	49,2	19	M14			UC209		2,14	
UCP209-26	15/8															UC209-26		2,24	
UCP209-27	111/16	21/8	715/32	5¾	21/8	43/64	25/32	25/32	411/64	223/32	1,9370	0,748	½		32395	20235	UC209-27	P209	2,20
UCP209-28	1¾															UC209-28		2,14	
UCP210	50	57,2	206	159	60	20	23	21	113	74,5	51,6	19	M16			UC210		2,66	
UCP210-29	113/16															UC210-29		2,78	
UCP210-30	17/8	2¼	81/8	6¼	23/8	25/32	29/32	53/64	429/64	215/16	2,0315	0,748	5/8		33345	22135	UC210-30	P210	2,73
UCP210-31	115/16															UC210-31		2,68	
UCP210-32	2															UC210-32		2,64	
UCP211	55	63,5	219	171	60	20	23	23	125	76	55,6	22,2	M16			UC211		3,31	
UCP211-32	2															UC211-32		3,46	
UCP211-33	21/16	2½	85/8	647/64	23/8	25/32	29/32	29/32	459/64	3	2,1890	0,874	5/8		41230	27930	UC211-33	P211	3,40
UCP211-34	21/8															UC211-34		3,35	
UCP211-35	23/16															UC211-35		3,29	
UCP212	60	69,8	241	184	70	20	23	25	138	89	65,1	25,4	M16			UC212		4,90	
UCP212-36	2¼															UC212-36		5,03	
UCP212-37	25/16	2¾	9½	7¼	234	25/32	29/32	63/64	57/16	3½	2,5630	1,000	5/8		49780	34390	UC212-37	P212	4,95
UCP212-38	23/8															UC212-38		4,88	
UCP212-39	27/16															UC212-39		4,81	
UCP213	65	76,2	265	203	70	25	28	27	150	89	65,1	25,4	M20			UC213		5,15	
UCP213-40	2½	3	107/16	8	2¾	63/64	13/32	11/16	529/32	3½	2,5630	1,000	¾		54340	38095	UC213-40	P213	5,24
UCP213-41	29/16															UC213-41		5,15	
UCP214	70	79,4	266	210	72	25	28	27	156	-	74,6	30,2	M20			UC214		6,20	
UCP214-42	25/8															UC214-42		6,41	
UCP214-43	211/16	31/8	1015/32	817/64	227/32	63/64	13/32	11/16	69/64	-	2,9370	1,189	¾		59090	41895	UC214-43	P214	6,31
UCP214-44	2¾															UC214-44		6,21	
UCP215	75	82,6	275	217	74	25	28	28	162	-	77,8	33,3	M20			UC215		7,16	
UCP215-45	213/16															UC215-45		7,41	
UCP215-46	27/8	3¼	1053/64	835/64	229/32	63/64	13/32	13/32	63/8	-	3,0630	1,311	¾		64030	45885	UC215-46	P215	7,30
UCP215-47	215/16															UC215-47		7,19	
UCP215-48	3															UC215-48		7,07	
UCP216	80	88,9	292	232	78	25	28	30	174	-	82,6	33,3	M20			UC216		8,10	
UCP216-49	31/16															UC216-49		8,28	
UCP216-50	31/8	3½	11½	91/8	31/16	63/64	13/32	13/16	627/32	-	3,2520	1,311	¾		69065	50350	UC216-50	P216	8,15
UCP216-51	33/16															UC216-51		8,02	
UCP217	85	95,2	310	247	83	25	28	32	185	-	85,7	34,1	M20			UC217		9,81	
UCP217-52	3¾															UC217-52		10,03	
UCP217-53	35/16	3¾	1213/64	923/32	317/64	63/64	13/32	1¼	79/32	-	3,3740	1,343	¾		79800	58805	UC217-53	P217	9,89
UCP217-55	37/16															UC217-55		9,60	
UCP218	90	101,6	327	262	88	27	30	33	198	-	96	39,7	M22			UC218		11,96	
UCP218-56	3½	4	127/8	105/16	315/32	11/16	13/16	119/64	751/64	-	3,7795	1,5630	7/8		91295	67925	UC218-56	P218	12,07

Lieferbar aus rostfreiem Stahl Gehäuse: AISI 304 - Lager: AISI 440C - Поставляется в исполнении из нержавеющей стали Корпус: AISI 304 - Подшипник: AISI 440C
Auf Anfrage mit Lager SA (SAP.) lieferbar - На заказ поставляется с подшипником серии SA (SAP.)