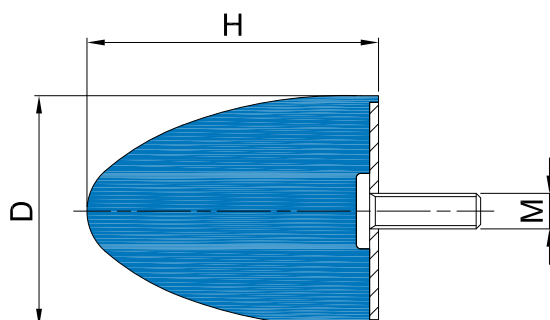


Codice	D	H	M x 1	Rigidezza 45 IRHD (daN/mm)	Rigidezza 60 IRHD (daN/mm)	Rigidezza 70 IRHD (daN/mm)	Deflessione statica max. (mm)
Item	D	H	M x 1	Stiffness 45 IRHD (daN/mm)	Stiffness 60 IRHD (daN/mm)	Stiffness 70 IRHD (daN/mm)	Max static deflection (mm)
PMP242518	24	25	M6X18	5,6	8,2	11,4	5,0
PMP243518	24	35	M6X18	3,5	5,1	7,1	7,0
PMP303014	30	30	M6X14	4,9	7,2	9,9	6,0
PMP303614	30	36	M6X14	5,5	8,0	10,8	7,2
PMP453023	45	30	M8X23	12,8	12,8	12,8	6,0
PMP505023	50	50	M8X23	5,7	7,1	10,1	10,0
PMP505025	50	50	M10X25	5,7	7,1	10,1	10,0
PMP506733	50	67	M8X33	4,9	7,1	9,8	13,4
PMP606037	60	60	M12X37	13,0	19,1	26,3	12,0
PMP1008344	100	83	M16X44	29,4	43,0	59,3	16,6
PMP1009531	100	95	M12X31	9,4	18,8	28,3	19,0
PMP1009544	100	95	M16X44	9,4	18,8	28,3	19,0
PMP10012031	100	120	M12X31	7,0	14,0	21,0	24,0
PMP10012044	100	120	M16X44	7,0	14,0	21,0	24,0