Model Number

V3-4A-E2-V19

Splitter box 4 x M8 single allocation, with 8-pole M12 plug

Features

- Fast, flexible installation/separation
- LED indicator for module supply and I/O status
- Degree of protection IP67

Dimensions

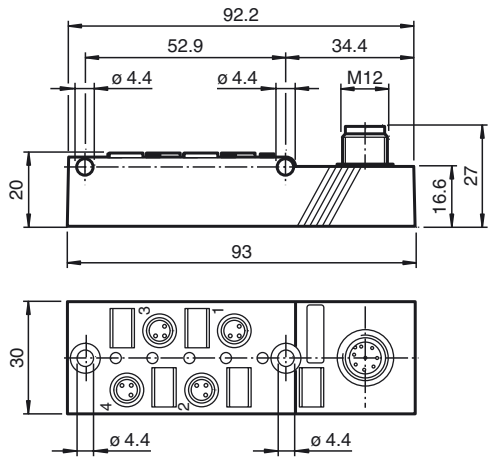

Technical data

General specifications		
Number of pins		3
UL File Number		E191152
Color		black
Electrical specifications		
Operating voltage	U_B	24 V DC, max. 30 V DC
Operating current	I_B	≤ 5 mA per channel indication element
Current loading capacity		≤ 2 A per channel, ≤ 2 A per plug-in station, ≤ 4 A total current per splitter box
Output		
Number/Type		4
Ambient conditions		
Ambient temperature		-30 ... 80 °C (-22 ... 176 °F)
Mechanical specifications		
Connection type		4 x socket M8 x 1 3-pin 1 x Male connector M12 8-pin
Degree of protection		IP67 according to EN 60529
Mass		approx. 93 g
Flammability		94 V-0
Compliance with standards and directives		
Standard conformity		
Degree of protection		EN 60529

Release date: 2018-03-22 11:19 Date of issue: 2018-03-22 204158_eng.xml

Electrical connection

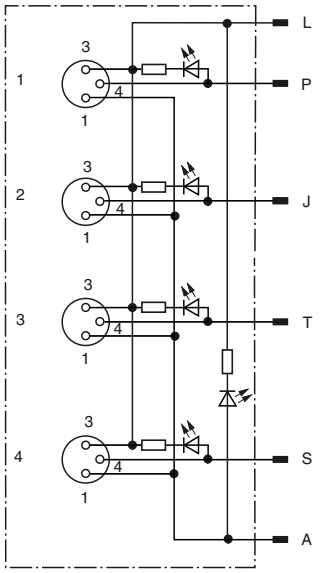

M12-connector -V19	M8-socket/pole
P	1/4 (A)
J	2/4 (A)
T	3/4 (A)
S	4/4 (A)
A	1 ... 4/1 (+24 V)
L	1 ... 4/3 (0 V)

Displays



M12-connector -V19



M8-socket

Release date: 2018-03-22 11:19 Date of issue: 2018-03-22 204158_eng.xml

Refer to “General Notes Relating to Pepperl+Fuchs Product Information”.
Pepperl+Fuchs Group www.pepperl-fuchs.com
USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com
Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com
Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com
PEPPERL+FUCHS SENSING YOUR NEEDS