




Field-attachable male connector V23S-19-G

Field-attachable male connector



Dimensions

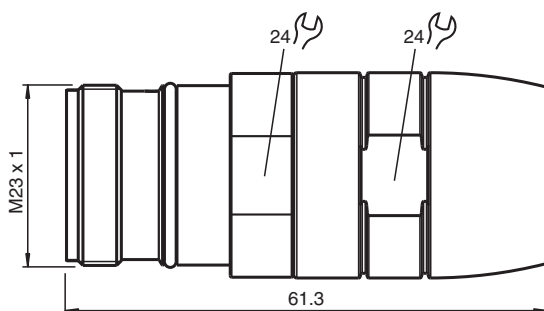

Technical Data

General specifications

Number of pins	16+3
Connection 1	Male connector
Construction type 1	straight
Threading 1	M23

Electrical specifications

Operating voltage	U_B	max. 48 V AC / 60 V DC
Operating current	I_B	10 A

Ambient conditions

Ambient temperature	-20 ... 125 °C (-4 ... 257 °F)
Storage temperature	-15 ... 35 °C (5 ... 95 °F)
Pollution degree	3

Mechanical specifications

Degree of protection	IP67
Connection	Solder connection for max. 1 mm ²
Material	
Contacts	CuZn, gold-plated

Release date: 2020-09-10 Date of issue: 2020-09-10 Filename: 203481_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Contact surface	Ni/Au
Body	CuZn
Slotted nut	CuZn
Cable	
Sheath diameter	2 mm ... 14.5 mm

Connection



Release date: 2020-09-10 Date of issue: 2020-09-10 Filename: 203481_eng.pdf