




Indicative image

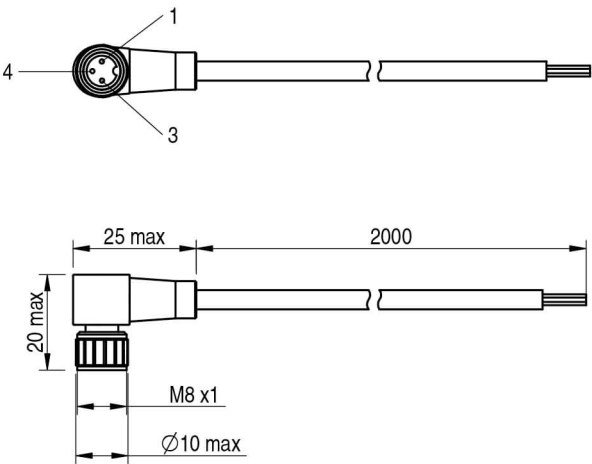

**Electrical data**

|                       |                 |
|-----------------------|-----------------|
| Nominal current       | 4 A             |
| Led                   | no              |
| Wires                 | 3               |
| Rated impulse voltage | 1,5 kV          |
| Nominal voltage       | Max. 60 V ac/dc |

**Mechanical data**

|                       |                                                                         |
|-----------------------|-------------------------------------------------------------------------|
| Connections           | With open ended wires                                                   |
| Tightening torque     | 0,4 Nm                                                                  |
| Operating temperature | -5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation) |
| 1                     | 2                                                                       |
| Head type             | 90°                                                                     |
| Plug                  | M8                                                                      |
| Outer diameter        | Ø 3,75 mm ±0,2mm                                                        |
| Jacket material       | PUR                                                                     |
| Wire isolation        | PVC                                                                     |
| Conductors section    | 0,25 mm2 (32 x 0,10 mm2)                                                |

Model

Femmina

### Test/Approvals

Degree of protection

IP67

### Generical Data

Operating Temperature

-5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation)

Mechanical Protection

IP67

---

## ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---

BN/1

BU/3

BK/4

---

### Datasensing S.r.l.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@datasensing.com](mailto:info@datasensing.com)

### date of printing

29/04/2022 12:25:59