

# Product data sheet

## Characteristics

# XZCPB1141L10

pre-wired connectors XZ -straight female -  
M12-4 pins - shielded cable PUR 10m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

### Complementary

Electrical connection	Straight female connector M12, 4 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	10 m
Cable outer diameter	5.9 mm
Cable composition	4 x 0.34 mm <sup>2</sup>
Wire insulation material	PUR (shielded cable)
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.6 kg

### Environment

IP degree of protection	IP65 IP67
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	450 g
Package 1 Height	4 cm
Package 1 width	18 cm
Package 1 Length	19 cm
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Weight	4.774 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

## Offer Sustainability

---


REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes

---

---

Dimensions

---

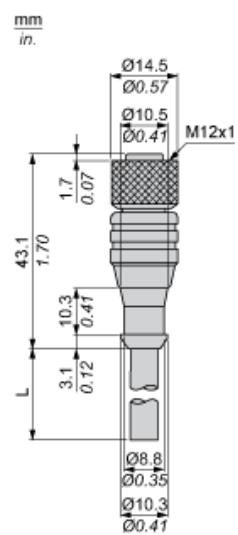


L : Length of cable

---

Connections and Schemes

---

Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White