

Product data sheet

Characteristics

XZCPB1241L10

pre-wired connectors XZ -elbowed female -
M12-4 pins - shielded cable PUR 10m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	Application

Complementary

Electrical connection	Elbowed female connector M12, 4 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	10 m
Cable outer diameter	5.9 mm
Cable composition	4 x 0.34 mm ²
Wire insulation material	PUR (shielded cable)
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.8 kg

Environment

IP degree of protection	IP65 IP67
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	400 g
Package 1 Height	2 cm
Package 1 width	30 cm
Package 1 Length	40 cm

Offer Sustainability

REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes


Dimensions

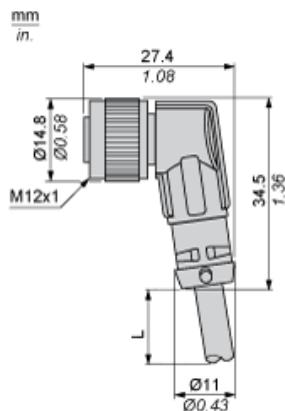

L : Length of cable

Connections and Schemes

Connector



BN : Brown
BK : Black
BU : Blue
WH : White