

Product data sheet

Characteristics

XZCPV1264L2

pre-wired connectors XZ - elbowed female -
M12 - 5 pins - cable PVC 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Elbowed female connector M12, 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	2 m
Cable outer diameter	5.2 mm
Cable composition	5 x 0.25 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.1 kg

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

Packing Units

Package 1 Weight	0.100 kg
Package 1 Height	0.400 dm
Package 1 width	2.400 dm
Package 1 Length	3.000 dm


Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

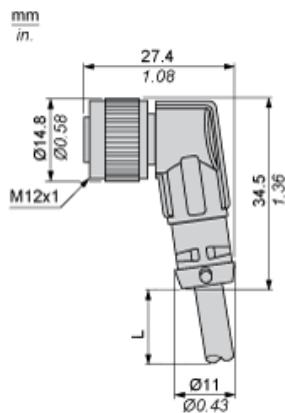

L : Length of cable

Connections and Schemes

Connectors



BU : Blue

BN : Brown

BK : Black

Y/G : Yellow / Green

BK/ Black / White

WH :