

Product data sheet

Characteristics

XZCPV1965L5

pre-wired connectors XZ - elbowed female -
1/2"20 UNF - 3 pins - cable PVC 5m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Elbowed female connector 1/2"20 UNF, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	5 m
Cable outer diameter	5.2 mm
Cable composition	3 x 0.34 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.35 kg

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

Packing Units

Package 1 Weight	0.210 kg
Package 1 Height	0.800 dm
Package 1 width	0.500 dm
Package 1 Length	1.500 dm


Offer Sustainability

REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

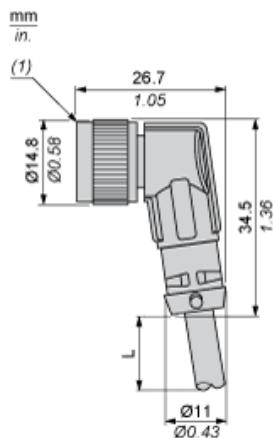

L : Length of cable
(1) 1/2"-20UNF

Connections and Schemes

Connectors



GN : Green
RD/ Red / White
WH :
RD/ Red / Black
BK :