XZCPY1764L10

pre-wired connectors XZ - straight female - 7/8" - 5 pins - cable PVC 10m

---

Product Life Status :   END OF COMMERCIALIZATION

TODAY
FEB 22, 2021

End of Commercialization
NOV 03, 2020

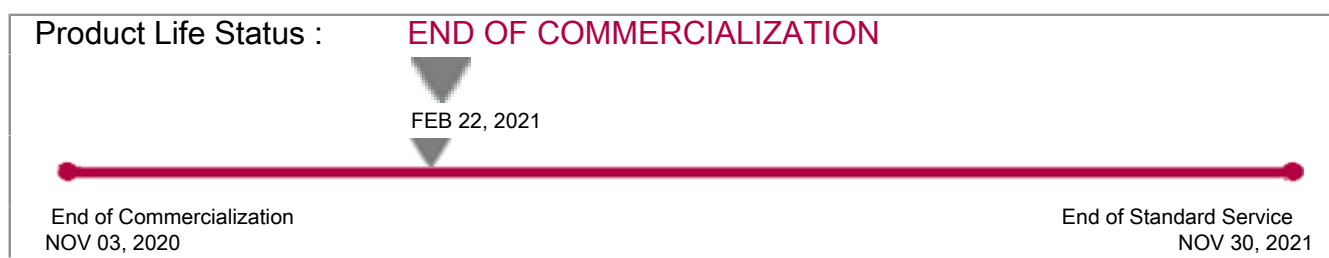End of Standard Service
NOV 30, 2021

Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Product Life Status :   END OF COMMERCIALIZATION

FEB 22, 2021

End of Commercialization
NOV 03, 2020

End of Standard Service
NOV 30, 2021

Complementary

Electrical connection	Straight female connector 7/8", 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	10 m
Cable outer diameter	8.1 mm
Cable composition	5 x 1.5 mm²
Wire insulation material	PVC
[Ue] rated operational voltage	600 V AC 600 V DC
[In] rated current	10 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	1.9 kg

Environment

IP degree of protection	IP67
Product certifications	CULus
Ambient air temperature for operation	-25…80 °C static
Ambient air temperature for storage	-25…80 °C

Packing Units

Package 1 Weight	1.960 kg
Package 1 Height	0.700 dm
Package 1 width	2.600 dm
Package 1 Length	2.800 dm

Offer Sustainability

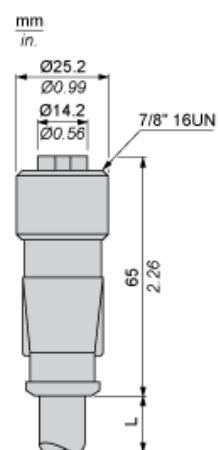|	
REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months

Telemecanique
Sensors

Dimensions

mm
in.

Ø25.2
Ø0.99

Ø14.2
Ø0.56

7/8" 16UN

65
2.26

L

L :   Lenght of cable

Connections and Schemes

Connectors

RD : Red
WH : White
BK : Black
GN : Green
OR : Orange

Telemecanique
Sensors