

Product data sheet

Characteristics

XZCPY1764L2

pre-wired connectors XZ - straight female - 7/8"
- 5 pins - cable PVC 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Straight female connector 7/8", 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	2 m
Cable outer diameter	8.1 mm
Cable composition	5 x 1.5 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	600 V AC 600 V DC
[In] rated current	10 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.4 kg

Environment

IP degree of protection	IP67
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C


Packing Units

Package 1 Weight	0.422 kg
Package 1 Height	0.400 dm
Package 1 width	2.200 dm
Package 1 Length	2.800 dm

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

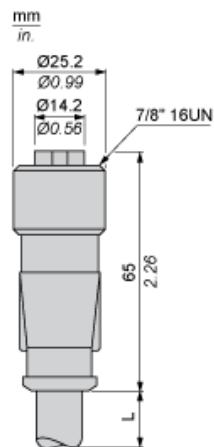

L : Length of cable

Connections and Schemes

Connectors



RD : Red

WH : White

BK : Black

GN : Green

OR : Orange