

# Product data sheet

## Characteristics

### XZCPY4275L5

pre-wired connectors XZ - straight female - 7/8"  
- 4 pins - cable PVC 5m



#### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

#### Complementary

Electrical connection	Straight female connector 7/8", 4 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	5 m
Cable outer diameter	10.8 mm
Cable composition	4 x 1.5 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	600 V AC 600 V DC
[In] rated current	10 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.85 kg

#### Environment

IP degree of protection	IP67
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

#### Packing Units

Package 1 Weight	0.762 kg
Package 1 Height	0.400 dm
Package 1 width	2.800 dm
Package 1 Length	2.900 dm


#### Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions


---

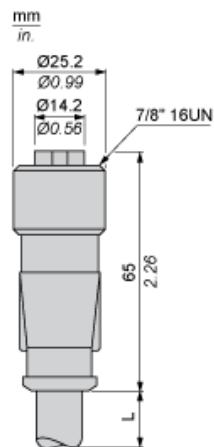

L : Length of cable

## Connections and Schemes

## Connectors



RD : Red

RD : Red  
WH : White

WT: White  
BK: Black

GN : Green