

# Product data sheet

## Characteristics

# XZCC12MCP40B

male, M12, 4-pin, Elbowed connector - cable gland Pg 7



### Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Elbowed male connector M12, 4 pins
Collar material	Plastic
Status LED	Without
Cable connection	Screw terminal / wire size <0.75 mm <sup>2</sup> / clamping capacity 3...6 mm

### Complementary

Cable gland type	Pg 7
Cable connector fixing	Screw-on
[Ue] rated operational voltage	125 V AC 150 V DC
[In] rated current	3 A
Enclosure material	Plastic
Minimum insulating resistance	1000 GΩ
Contact resistance	8000 µOhm
Net weight	0.025 kg

### Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...85 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	20 g
Package 1 Height	3.3 cm
Package 1 width	5.8 cm
Package 1 Length	12.3 cm
Unit Type of Package 2	S01
Number of Units in Package 2	50
Package 2 Weight	1.23 kg
Package 2 Height	15 cm
Package 2 width	15 cm
Package 2 Length	40 cm

## Offer Sustainability

---

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 Yes

---

## Contractual warranty

---


Warranty	18 months
----------	-----------

---

---

Dimensions

---

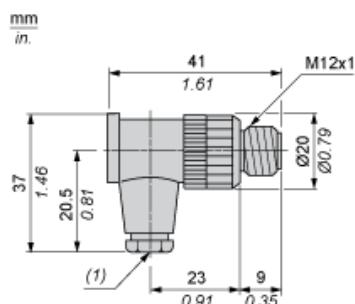

(1) Cable gland : no. 7 plastic (Pg 7)

---

Connections and Schemes

---

