


Product data sheet

Characteristics

XZCC12MCP42B

male, M12, 4-pin, Elbowed connector - cable gland Pg 7

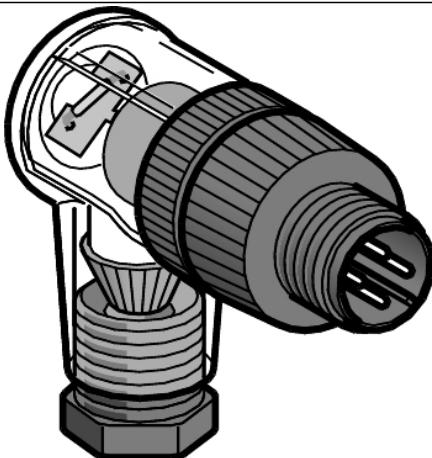

Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Elbowed male connector M12, 4 pins
Collar material	Plastic
Status LED	2 PNP LEDs
Cable connection	Screw terminal / wire size <0.75 mm ² / clamping capacity 3...6 mm

Complementary

Cable gland type	Pg 7
Cable connector fixing	Screw-on
[Ue] rated operational voltage	10...30 V DC
[In] rated current	3 A
Enclosure material	Plastic
Minimum insulating resistance	1000 GΩ
Contact resistance	8000 µOhm
Net weight	0.025 kg

Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...85 °C


Packing Units

Package 1 Weight	0.018 kg
Package 1 Height	0.200 dm
Package 1 width	0.450 dm
Package 1 Length	0.450 dm

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

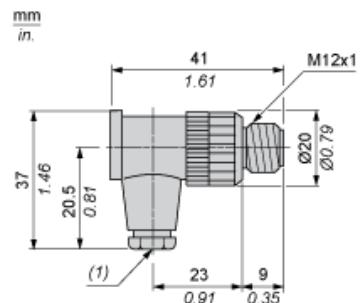


(1) Cable gland : no. 7 plastic (Pg 7)

Connections and Schemes



Connections and Schemes

LED Connection



BN : Brown

BK : Black

BU : Blue

GN : Green

YW : Yellow

(1) Signal