

Product data sheet

Characteristics

XZCC20MCM30B

male, 1/2 20UNF, 3-pin, Elbowed connector -
cable gland Pg 7



Main

| | |
|------------------------------------|---|
| Accessory / separate part category | Cabling accessories |
| Accessory / separate part type | Connector |
| Electrical connection | Elbowed male connector 1/2 20 UNF, 3 pins |
| Collar material | Metal |
| Status LED | Without |
| Cable connection | Screw terminal / wire size <0.75 mm ² / clamping capacity 3...6 mm |

Complementary

| | |
|--------------------------------|-----------|
| Cable gland type | Pg 7 |
| Cable connector fixing | Screw-on |
| [Ue] rated operational voltage | 250 V AC |
| [In] rated current | 4 A |
| Enclosure material | Plastic |
| Minimum insulating resistance | 1000 GΩ |
| Contact resistance | 8000 µOhm |
| Net weight | 0.025 kg |

Environment

| | |
|---------------------------------------|-------------|
| IP degree of protection | IP67 |
| Ambient air temperature for operation | -40...85 °C |

Packing Units

| | |
|------------------------------|-------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 23 g |
| Package 1 Height | 2 cm |
| Package 1 width | 6 cm |
| Package 1 Length | 8 cm |
| Unit Type of Package 2 | S01 |
| Number of Units in Package 2 | 20 |
| Package 2 Weight | 658 g |
| Package 2 Height | 15 cm |
| Package 2 width | 15 cm |
| Package 2 Length | 40 cm |


Offer Sustainability

| | |
|-------------------|---|
| REACH Regulation |  REACH Declaration |
| EU RoHS Directive | Not applicable, out of EU RoHS legal scope |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

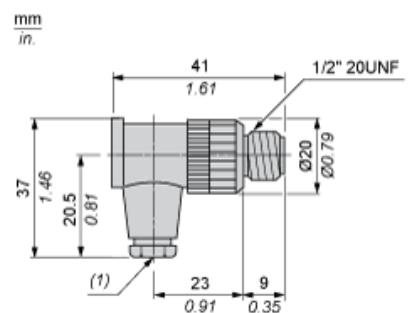

(1) Cable gland : no. 7 plastic (Pg 7)

Connections and Schemes

