


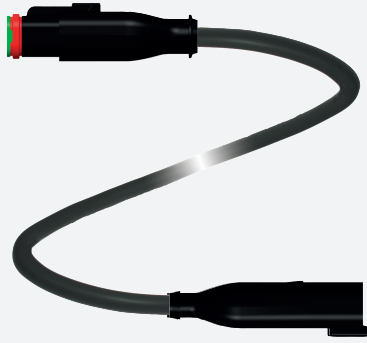

Connection cable


DT4S-G-BK5M-PUR-O1-DT4P-G

- Suitable for outdoor use (UV- and ozone resistant)
- Suitable for drag chains and abrasion resistant
- Degree of protection IP68
- Resistant to microbes and hydrolysis
- Oil resistant
- Resistant to salt water
- Halogen-free
- Snap locking

Cordset Deutsch socket straight to Deutsch plug straight, 4-pin, PUR cable black, drag chain suitable, outdoor



Dimensions

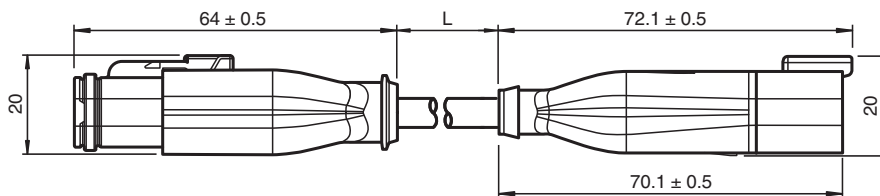

Technical Data

General specifications

Connector 1		
Connection		socket
Construction type		Deutsch connectors
Style		straight
Locking		Snap locking
Number of pins		4
Connector 2		
Connection		Male connector
Construction type		Deutsch connectors
Style		straight
Locking		Snap locking
Number of pins		4

Electrical specifications

Operating voltage	U _B	max. 48 V AC / 60 V DC
Operating current	I _B	max. 8 A Per contact

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 7011662_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Conformity

Degree of protection	EN 60529
Flammability	UL 1581; DIN EN 60332-2-2
Halogen-free	DIN VDE 0472-815 / DIN EN 50267-2-1
Oil resistance	DIN EN 60811-2-1

Ambient conditions

Ambient temperature	
Plug connector	-40 ... 125 °C (-40 ... 257 °F)
Cable, fixed	-50 ... 105 °C (-58 ... 221 °F)
Cable, flexing	-30 ... 105 °C (-22 ... 221 °F)
Pollution degree	3

Mechanical specifications


Plug connector	
Loosening protection	available
Degree of protection	IP68
Cable	according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter	4.8 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed
Sheath stripping force	max. 50 N / 300 mm
Sheath color	black (similar to RAL 7021)
Number of cores	4
Core cross-section	0.5 mm ²
Cores color	Core 1: brown Core 2: white Core 3: blue Core 4: black
Core construction	28 x 0.15 mm Ø 1 x symmetrically twisted
Length	L 5 m
Cable code	Li 9Y 11Y 4 x 0,50
Drag chain suitability	
Drag chain cycles	min. 2000000
Motion velocity	max. 3 m/s
Traverse distance	10 m
Acceleration	max. 10 m/s ²

Material

Halogen-free	yes
Plug connector	
Body	PA, black
Contact surface	Ni
Flammability	V-0
Cable	
Sheathing	PUR based on polyether
Core insulation	PP
Salt water resistance	yes
UV resistance	yes
Chemical resistance	good
Oil resistance	yes
Cooling lubricant resistance	yes
Microbial resistance	yes
Hydrolysis resistance	yes
Flammability	FT2

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 70116662_eng.pdf

Connection Assignment

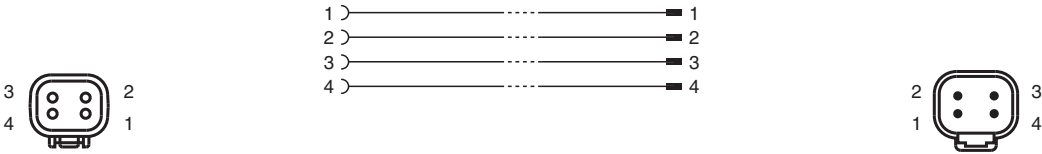

Release date: 2020-09-23 Date of issue: 2020-09-23 Filename: 70116662_eng.pdf