



Model Number


V1-W-BK10M-PUR-R1

Single-ended female cordset, M12, PUR cable, 4-pin, robotics

Features

- Highly flexible—suitable for robotics
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Suitable for drag chains
- Flame resistant cable
- Halogen-free
- Degree of protection IP67 / IP68 / IP69K
- Resistant to microbes and hydrolysis

Dimensions

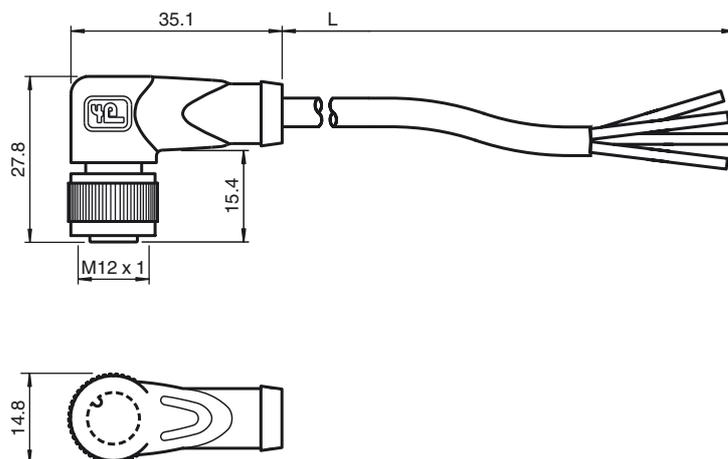

Technical data

General specifications

Number of pins	4
----------------	---

Electrical specifications

Operating voltage	U_B	max. 250 V AC/DC
Test voltage		> 1500 V _{eff} AC
Operating current	I_B	max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F)
---------------------	--

Pollution degree	3
------------------	---

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k

Material

Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP

Cable

Sheath diameter	\varnothing 4.3 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed

Color	black (similar to RAL 7021)
-------	-----------------------------

Number of cores	4
-----------------	---

Core cross-section	0.34 mm ²
--------------------	----------------------

Conductor construction	42 x 0.1 mm \varnothing
------------------------	---------------------------

Length	L	10 m
--------	---	------

Drag chain suitability

Drag chain cycles	\geq 10000000
-------------------	-----------------

Motion velocity	\leq 3 m/s
-----------------	--------------

Acceleration	\leq 10 m/s ²
--------------	----------------------------

Torsional stress	\pm 360 °/m
------------------	---------------

Flammability

Contact carrier	94 HB
-----------------	-------


Housing	94 V-2
---------	--------

Cable	FT2
-------	-----

Compliance with standards and directives

Standard conformity	
---------------------	--

Electrical connection

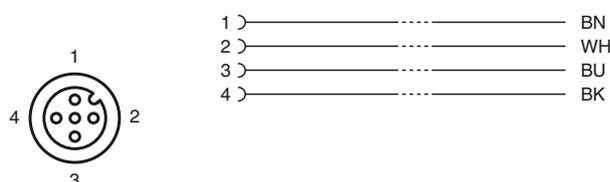



Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	Grip: UL 94 Cabling: in accordance with UL FT2
Halogen-free	DIN VDE 0472 Part 15 (plastic) DIN EN 50267-2-1 (flue gas)
Chemical resistance	EN 60811-404: 168 h at 100° C
Approvals and certificates	
UL approval	AWM STYLE 20549 80 °C 300V AWM I A/B 80 °C 300V FT2 (cable)

Release date: 2016-07-15 11:50 Date of issue: 2016-08-02 295361_eng.xml