



Model Number


V1-W-BK1,5M-PUR-O1S-V1-W

Cordset, M12 to M12, PUR cable, 4-pin, shielded, outdoor

Features

- Suitable for drag chains
- Suitable for outdoor use (UV- and ozone resistant)
- Resistant to salt water
- Flame resistant cable
- Oil and abrasion resistant PUR line appropriate for drag chains
- Halogen-free
- Resistant to microbes and hydrolysis
- Free from substances that impair paint wetting
- Immunity to vibration, with mechanical latching
- Knurled nut suitable for tool assembly

Dimensions

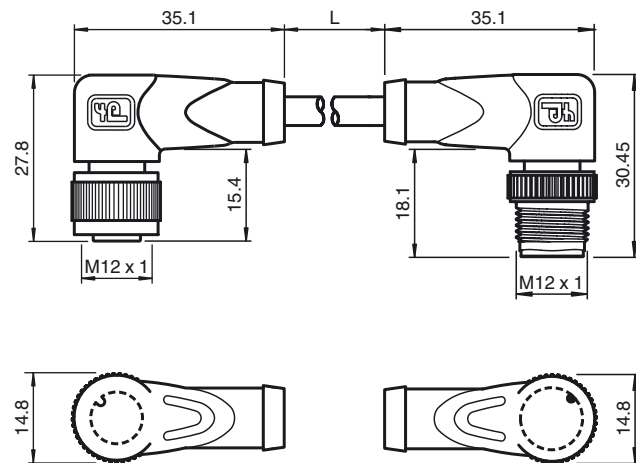

Technical data

General specifications

Number of pins	4 + shield
Connection 1	socket
Construction type 1	right angle
Threading 1	M12
Connection 2	Male connector
Construction type 2	right angle
Threading 2	M12

Electrical specifications

Operating voltage	U_B	max. 300 V AC
Operating current	I_B	max. 4 A
Lead resistance		Max. 39 Ω /km


Ambient conditions

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, fixed: -50 ... 105 °C (-58 ... 221 °F) cable, flexing: -30 ... 105 °C (-22 ... 221 °F)
Pollution degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69
Cable code	(4 Li9Y 0.50 mm ²) V1-C-V1-11Y
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Sleeve connector	Diecast zinc
Core insulation	PP
Cable	extra-fine wire, flexible
Sheath diameter	$\varnothing$ 6 mm $\pm$ 0.2 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed
Color	black (similar to RAL 7021)
Number of cores	4
Core cross-section	0.5 mm ²
Conductor construction	28 x 0.15 mm $\varnothing$
Shield	grid 85% coverage
Length	L 8 m
Drag chain suitability	
Drag chain cycles	$\geq$ 2000000
Motion velocity	$\leq$ 3 m/s

Electrical connection

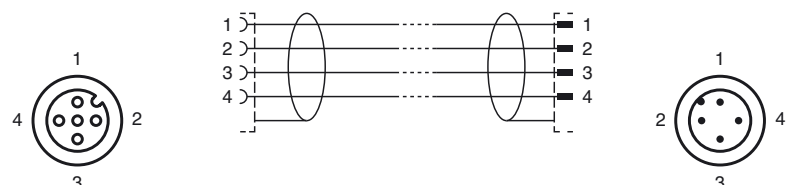



Traverse distance	≤ 10 m
Acceleration	≤ 10 m/s ²
Flammability	
Contact carrier	94 HB
Housing	94 V-2
Cable	FT2
Compliance with standards and directives	
Standard conformity	
Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	UL 1581; DIN EN 60332-2-2
Halogen-free	DIN VDE 0472-815 DIN EN 50267-2-1
Chemical resistance	DIN EN 60811-2-1:2002
Approvals and certificates	
UL approval	cURus AWM 21924/11558 105°C 300V FT2