



Model Number


V1-W-E8W-BK1M-PUR-A

Single-ended female cordset, M12, LED, 4-pin, PUR cable, weld spatter resistant

Features

- Built-in LED, as operating and function indicator
- Knurled nut suitable for tool assembly
- Improved resistance to weld slag
- Suitable for drag chains
- Suitable for robotic applications / torsion resistant
- Flame resistant cable
- Halogen-free
- Resistant to microbes and hydrolysis
- Free from substances that impair paint wetting
- Gold plated contacts

Dimensions

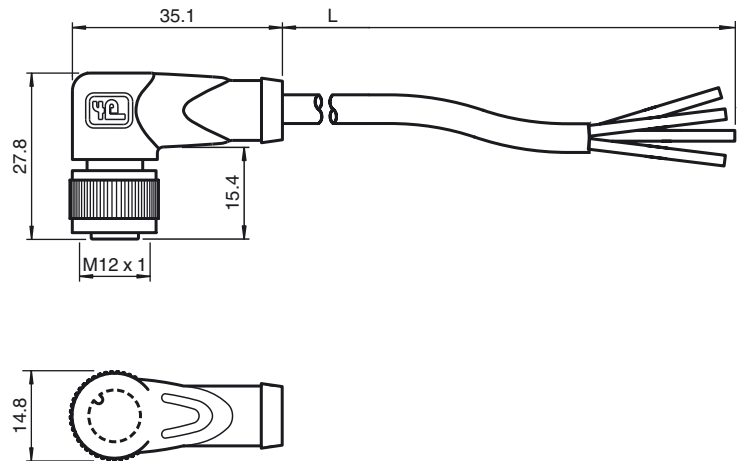

Technical data

General specifications

Number of pins	4
Connection 1	socket
Construction type 1	right angle
Threading 1	M12
Connection 2	cable end
UL File Number	E231213

Indicators/operating means

LED green	Operating display
LED yellow	Functional display NO contact 4
LED white	Functional display NO contact 2

Electrical specifications

Operating voltage	U_B	max. 24 V DC $\pm$ 15%
Operating current	I_B	max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F)
---------------------	--

Pollution degree	3
------------------	---

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k

Material

Contacts	CuSn / Au
Contact surface	Au
Body	TPU, transparent
Cable	PUR resistant to weld spatter
Slotted nut	Diecast zinc

Core insulation

Core insulation	PP
-----------------	----

Cable

Sheath diameter	$\varnothing$ 4.3 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed

Color	black
-------	-------

Cores	4 x 0.34 mm ²
-------	--------------------------


Conductor construction	42 x 0.1 mm $\varnothing$
------------------------	---------------------------

Length	L	1 m
--------	---	-----

Drag chain suitability

Drag chain cycles	$\geq$ 5000000 (at max. 60 °C)
Motion velocity	$\leq$ 3.3 m/s
Traverse distance	5 m horizontal
Acceleration	$\leq$ 5 m/s ²

Electrical connection

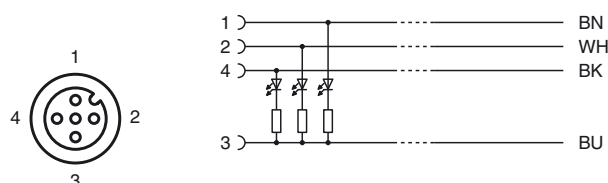



Torsion cycles	≥ 1000000 (at max. 60 °C)
Torsional stress	± 180 °/m
Flammability	
Contact carrier	94 HB
Housing	94 V-2
Cable	FT2
Compliance with standards and directives	
Standard conformity	
Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	Body: UL 94 Line: UL 1581 Section 1061; IEC 60332-1-2:2004
Halogen-free	IEC 60754-1:1994