



Model Number


V112-G-BK2M-PUR-V112-G

Cordset, M12 to M12, PUR cable, 12-pin

Features

- Immunity to vibration, with mechanical latching
- Knurled nut suitable for tool assembly
- Suitable for drag chains
- Resistant to microbes and hydrolysis
- Halogen-free

Dimensions

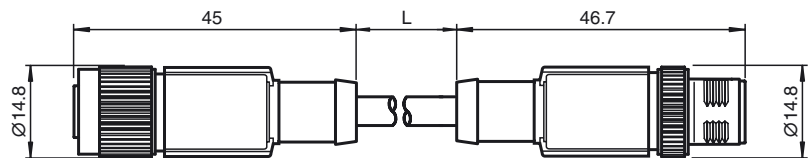

Technical data

General specifications

Number of pins	12
----------------	----

Electrical specifications

Operating voltage	U_B	30 V
Operating current	I_B	1.5 A
Surge protection		category II

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F) cable, flexing: -5 ... 80 °C (23 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
---------------------	--

Pollution degree	3
------------------	---

Mechanical specifications

Degree of protection	IP68	
Material		
Contacts	CuZn	
Contact surface	Ni/Au	
Body	TPU, green	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Seal	NBR	
Core insulation	PP	
Cable	extra-fine wire, flexible	
Sheath diameter	Ø 7.2 mm	
Core diameter	including insulation 1 mm ± 0.05 mm (signal line)	
Bending radius	54 mm	
Color	black	
Number of cores	12	
Core cross-section	0.14 mm ²	
Conductor construction	18 x 0.1 mm	
Length	L	2 m
Drag chain suitability		
Drag chain cycles	≥ 4000000	
Motion velocity	≤ 3 m/s	
Traverse distance	10 m	
Acceleration	≤ 10 m/s ²	

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Chemical resistance	DIN VDE 0472 T.803, test type B

Electrical connection

