



Model Number


V15-G-BK2M-PUR-U/0,75-V15-W

Cordset, M12, 5-pin, PUR cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Suitable for drag chains
- UL Recognized Component
- Degree of protection IP67 / IP68 / IP69K
- Gold plated contacts

Dimensions

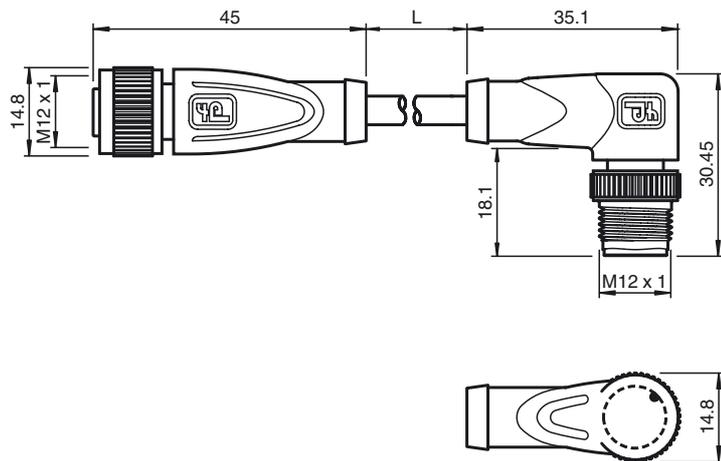

Technical data

General specifications

| | |
|---------------------|----------------|
| Number of pins | 5 |
| Connection 1 | socket |
| Construction type 1 | straight |
| Threading 1 | M12 |
| Connection 2 | Male connector |
| Construction type 2 | right angle |
| Threading 2 | M12 |
| UL File Number | E231213 |

Electrical specifications

| | | |
|-------------------|----------------|------------------------|
| Operating voltage | U _B | max. 48 V AC / 60 V DC |
| Operating current | I _B | max. 4 A |
| Volume resistance | | < 5 mΩ |


Ambient conditions

| | |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature | Body: -40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) |
| Pollution degree | 3 |

Mechanical specifications

| | |
|------------------------|---------------------------------------------------------------------------------------|
| Contact elements | spring-loaded contact socket |
| Pin diameter | 1 mm |
| Degree of protection | IP67 / IP68 / IP69k |
| Material | |
| Contacts | CuSn / Au |
| Contact surface | Au |
| Body | TPU, black |
| Cable | PUR |
| Slotted nut | Diecast zinc |
| Sleeve connector | Diecast zinc |
| Core insulation | PP |
| Cable | fine-strand, flexible |
| Sheath diameter | Ø 6 mm |
| Bending radius | > 10 x cable diameter, appropriate for conveyor chains > 5 x cable diameter, fixed |
| Color | black |
| Number of cores | 5 |
| Core cross-section | 0.75 mm ² |
| Conductor construction | 42 x 0.15 mm Ø |
| Length | L 2 m |
| Drag chain suitability | |
| Drag chain cycles | ≥ 2000000 |
| Motion velocity | ≤ 3.3 m/s |
| Traverse distance | 5 m |
| Acceleration | ≤ 5 m/s ² |

Electrical connection

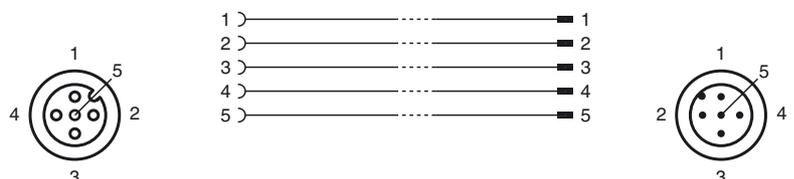

Release date: 2019-07-15 17:01 Date of issue: 2019-07-15 240778-0001_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

| | |
|-------------------------------------------------|----------------------------------------------------|
| Torsional stress | ±180 °/m |
| Flammability | |
| Contact carrier | HB |
| Housing | V-2 |
| Compliance with standards and directives | |
| Standard conformity | |
| Degree of protection | EN 60529:2000 |
| Flammability | Grip: UL 94 |
| Specification | connector M12 x 1 : IEC 61076-2-101 |
| Approvals and certificates | |
| UL approval | cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable) |

Release date: 2019-07-15 17:01 Date of issue: 2019-07-15 240778-0001_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com