



Model Number


V19-G-BK2M-PUR-U/ABG

Female cordset, M12, 8-pin, shielded, PUR cable

Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Flame resistant cable
- Halogen-free
- Shield attached to coupling nut

Dimensions

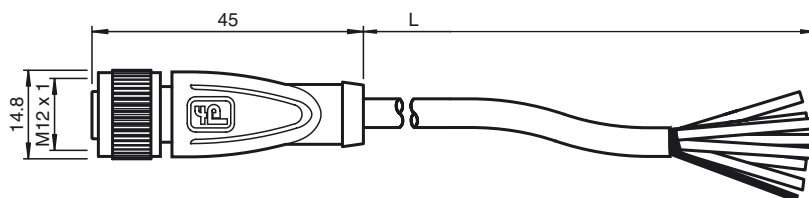

Technical data

General specifications

Number of pins	8 + shield
UL File Number	E231213

Electrical specifications

Operating voltage	U_B	max. 30 V DC
Operating current	I_B	max. 2 A
Volume resistance		< 5 mΩ

Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F)
---------------------	---

Pollution degree	3
------------------	---

Mechanical specifications

Contact elements	spring-loaded contact socket
------------------	------------------------------

Pin diameter	0,8 mm
--------------	--------

Degree of protection	IP67
----------------------	------

Material

Contacts	CuSn / Au
----------	-----------

Contact surface	Au
-----------------	----

Body	TPU, black
------	------------

Cable	PUR
-------	-----

Slotted nut	Diecast zinc
-------------	--------------

Core insulation	PP
-----------------	----

Cable	fine-strand, flexible
-------	-----------------------

Sheath diameter	Ø 6 mm
-----------------	--------

Bending radius	> 10 x cable diameter, moving
----------------	-------------------------------

Color	black
-------	-------

Number of cores	8
-----------------	---

Core cross-section	0.25 mm ²
--------------------	----------------------

Conductor construction	14 x 0.15 mm Ø
------------------------	----------------

Shield	grid covering 85 %
--------	--------------------

Length	L	2 m
--------	---	-----

Flammability

Contact carrier	94 HB
-----------------	-------

Housing	94 V-2
---------	--------

Approvals and certificates

UL approval	cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)
-------------	--

Electrical connection

