




Dimensions

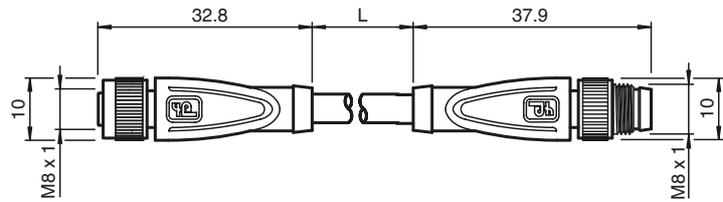

Model Number

V3-GM-BK0,6M-PUR-R1-V3-GM

Cordset, M8 to M8, PUR cable, 3-pin, robotics

Features

- Highly flexible - suitable for robotics
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Suitable for drag chains
- Flame resistant cable
- Halogen-free
- Degree of protection IP67 / IP68 / IP69K
- Resistant to microbes and hydrolysis

Technical data

General specifications

Number of pins	3
Connection 1	socket
Construction type 1	straight
Threading 1	M8
Connection 2	Male connector
Construction type 2	straight
Threading 2	M8

Electrical specifications

Operating voltage	U_B	max. 48 V AC / 60 V DC
Operating current	I_B	max. 3 A
Volume resistance		< 5 m Ω


Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F)
Pollution degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k
Cable code	LIF9Y 11Y
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Sleeve connector	Diecast zinc
Core insulation	PP
Cable	extra-fine wire, flexible
Sheath diameter	Ø 4.3 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed
Color	black (similar to RAL 7021)
Number of cores	4
Core cross-section	0.34 mm ²
Conductor construction	42 x 0.1 mm Ø
Length	L 0.6 m
Drag chain suitability	
Drag chain cycles	≥ 10000000
Motion velocity	≤ 3 m/s
Acceleration	≤ 10 m/s ²
Torsional stress	± 360 °/m

Electrical connection

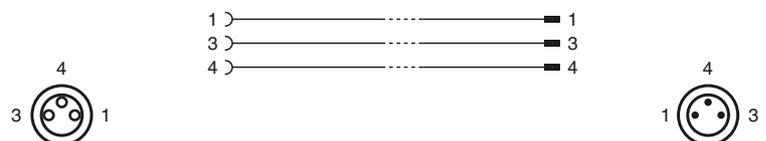

Release date: 2019-07-15 13:46 Date of issue: 2019-07-15 295364_eng.xml

Flammability	
Contact carrier	94 HB
Housing	94 V-2
Cable	FT2
Compliance with standards and directives	
Standard conformity	
Degree of protection	EN 60529:2000
Flammability	Grip: UL 94 Cabling: in accordance with UL FT2
Halogen-free	DIN VDE 0472 Part 15 (plastic) DIN EN 50267-2-1 (flue gas)
Chemical resistance	EN 60811-404: 168 h at 100° C
Specification	connector M8 x 1 : IEC 61076-2-104
Approvals and certificates	
UL approval	AWM STYLE 20549 80 °C 300V AWM I A/B 80 °C 300V FT2 (cable)

Release date: 2019-07-15 13:46 Date of issue: 2019-07-15 295364_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".