

# Product data sheet

## Characteristics

# XZCR1509041J1

jumper cable XZ - male straight M12 4-pin - female straight M8 4-pin - PUR 1m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M8 female 4 pins straight connector with screw-on
Cable composition	4 x 0.34 mm <sup>2</sup>
Cable length	1 m
Wire insulation material	PUR
Cable outer diameter	5.2 mm
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.055 kg

### Environment

IP degree of protection	IP65 IP67 IP69K
Product certifications	CULus
Ambient air temperature for operation	-35...90 °C static -5...90 °C flexing
Ambient air temperature for storage	-35...100 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	58 g
Package 1 Height	1.5 cm
Package 1 width	15 cm
Package 1 Length	15 cm
Unit Type of Package 2	S02
Number of Units in Package 2	50
Package 2 Weight	3.2 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 Yes
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

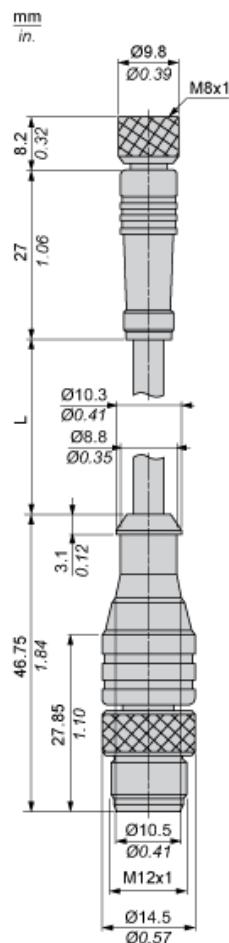

L : Length of cable

---

Connections and Schemes

---

