

# Product data sheet

## Characteristics

# XZCR1511062B1

jumper cable XZ - male straight M12 3-pin - female straight M12 3-pin - PUR 1m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 3 pins straight connector with screw-on
Jumper cable end 2	M12 female 3 pins straight connector with screw-on
Cable composition	3 x 0.5 mm <sup>2</sup>
Cable length	1 m
Wire insulation material	PUR
Cable outer diameter	5.2 mm
[Ue] rated operational voltage	30 V AC 36 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.065 kg

### Environment

IP degree of protection	IP67
Product certifications	CULus
Ambient air temperature for operation	-35...90 °C static -5...90 °C flexing
Ambient air temperature for storage	-35...100 °C

### Packing Units

Package 1 Weight	0.076 kg
Package 1 Height	0.150 dm
Package 1 width	1.500 dm
Package 1 Length	1.500 dm


### Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions

---

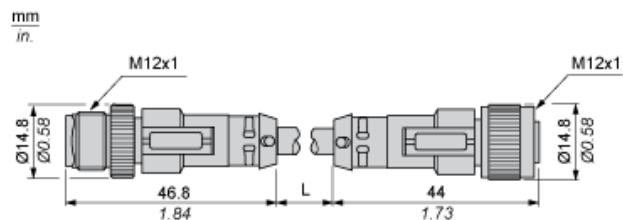

L : Length of cable

---

Connections and Schemes

---

