

Product data sheet

Characteristics

XZCR1511064D2

jumper cable XZ - male straight M12 5-pin - female straight M12 5-pin - PUR 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 5 pins straight connector with screw-on
Jumper cable end 2	M12 female 5 pins straight connector with screw-on
Cable composition	4 x 0.34 mm ² + 1 x 0.5 mm ²
Cable length	2 m
Wire insulation material	PUR
Cable outer diameter	5.9 mm
[Ue] rated operational voltage	30 V AC 36 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.13 kg

Environment

IP degree of protection	IP69K IP65 IP67
Product certifications	CULus
Ambient air temperature for operation	-35...90 °C static -5...90 °C flexing
Ambient air temperature for storage	-35...100 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	101.9 g
Package 1 Height	1.5 cm
Package 1 width	24 cm
Package 1 Length	24 cm
Unit Type of Package 2	BAG
Number of Units in Package 2	1
Package 2 Weight	102 g
Package 2 Height	1.5 cm
Package 2 width	24 cm

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Package 2 Length	24 cm
Unit Type of Package 3	S02
Number of Units in Package 3	40
Package 3 Weight	4.362 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

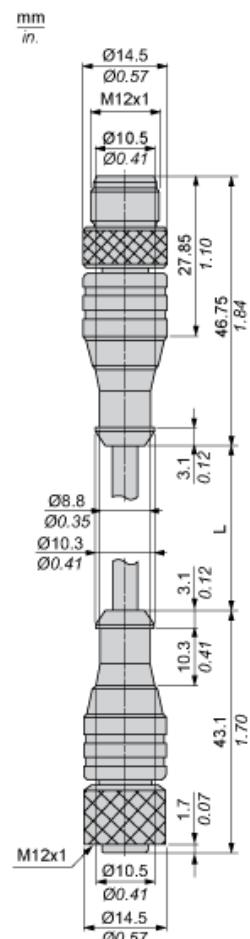

L : Length of cable

Connections and Schemes

