

## Main

|                                    |                   |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type     | Jumper cable      |

## Complementary

|                                     |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Jumper cable end 1                  | M8 male 3 pins straight connector with screw-on and clip-on |
| Jumper cable end 2                  | M8 female 4 pins straight connector with screw-on           |
| Collar material                     | Metal                                                       |
| Cable composition                   | 3 x 0.34 mm <sup>2</sup>                                    |
| Cable length                        | 1 m                                                         |
| Wire insulation material            | PUR                                                         |
| Cable outer diameter                | 5.2 mm                                                      |
| [Ue] rated operational voltage      | 45 V DC<br>60 V AC                                          |
| [In] rated current                  | 4 A                                                         |
| Insulation resistance               | >= 1000 MOhm                                                |
| Maximum resistance across terminals | 5000 mOhm                                                   |
| Net weight                          | 0.065 kg                                                    |

## Environment

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| IP degree of protection               | IP69K<br>IP67<br>IP65                    |
| Product certifications                | CULus                                    |
| Ambient air temperature for operation | -35...90 °C static<br>-5...90 °C flexing |
| Ambient air temperature for storage   | -35...100 °C                             |

## Packing Units

|                              |        |
|------------------------------|--------|
| Unit Type of Package 1       | PCE    |
| Number of Units in Package 1 | 1      |
| Package 1 Weight             | 70 g   |
| Package 1 Height             | 20 cm  |
| Package 1 width              | 1.5 cm |
| Package 1 Length             | 18 cm  |


## Offer Sustainability

|                            |                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                              |
| REACH Regulation           | <a href="#"> REACH Declaration</a>                                                                |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#"> EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                                                                                                                |
| RoHS exemption information | <a href="#"> Yes</a>                                                                              |
| Environmental Disclosure   | <a href="#"> Product Environmental Profile</a>                                                    |
| Circularity Profile        | <a href="#"> End of Life Information</a>                                                          |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

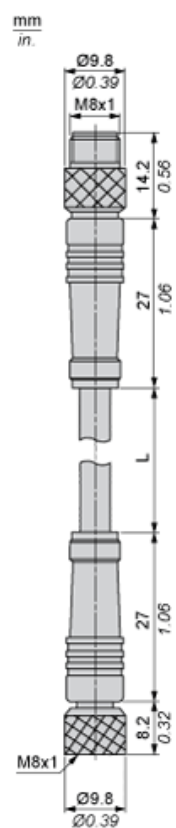

L : Length of cable

---

Connections and Schemes

---

