



## Main

|                                    |                   |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type     | Jumper cable      |

## Complementary

|                                     |                                                    |
|-------------------------------------|----------------------------------------------------|
| Jumper cable end 1                  | M12 male 3 pins straight connector with screw-on   |
| Jumper cable end 2                  | M12 female 3 pins straight connector with screw-on |
| Collar material                     | Metal                                              |
| Cable composition                   | 3 x 0.25 mm <sup>2</sup>                           |
| Cable length                        | 1 m                                                |
| Wire insulation material            | PVC                                                |
| Cable outer diameter                | 4.6 mm                                             |
| [Ue] rated operational voltage      | 250 V AC<br>300 V DC                               |
| [In] rated current                  | 3 A                                                |
| Insulation resistance               | >= 1000 MOhm                                       |
| Maximum resistance across terminals | 5000 mOhm                                          |
| Net weight                          | 0.07 kg                                            |

## Environment

|                                       |                    |
|---------------------------------------|--------------------|
| IP degree of protection               | IP65<br>IP67       |
| Product certifications                | CULus              |
| Ambient air temperature for operation | -25...80 °C static |
| Ambient air temperature for storage   | -25...80 °C        |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.054 kg |
| Package 1 Height | 0.150 dm |
| Package 1 width  | 1.600 dm |
| Package 1 Length | 1.600 dm |


## Offer Sustainability

|                            |                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------|
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                              |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                            |
| RoHS exemption information | Yes                                                                                            |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

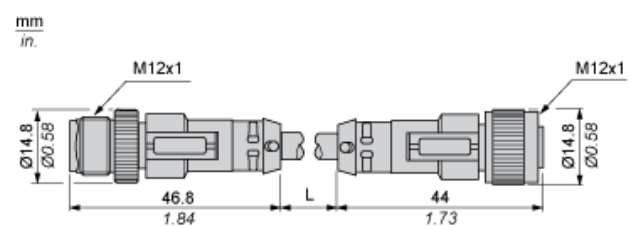

L : Length of cable

---

Connections and Schemes

---

