

# Product data sheet

## Characteristics

# XZCRV1511041C1

jumper cable XZ - male straight M12 4-pin - female straight M12 4-pin - PVC 1m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins straight connector with screw-on
Collar material	Metal
Cable composition	4 x 0.25 mm <sup>2</sup>
Cable length	1 m
Wire insulation material	PVC
Cable outer diameter	4.6 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.07 kg

### Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	59 g
Package 1 Height	1.5 cm
Package 1 width	13 cm
Package 1 Length	14 cm
Unit Type of Package 2	BAG
Number of Units in Package 2	1
Package 2 Weight	59 g
Package 2 Height	1.5 cm
Package 2 width	11 cm
Package 2 Length	13 cm
Unit Type of Package 3	S02

Number of Units in Package 3	50
Package 3 Weight	3.405 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

#### Offer Sustainability

REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes


#### Contractual warranty

Warranty	18 months
----------	-----------

---

Dimensions

---

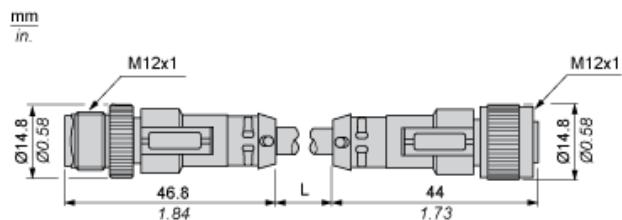

L : Length of cable

---

Connections and Schemes

---

