

# Product data sheet

## Characteristics

# XZCRV1512040A1

jumper cable XZ - male straight M12 3-pin - female elbowed M12 3-pin - PVC 1m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 3 pins straight connector with screw-on
Jumper cable end 2	M12 female 3 pins elbowed connector with screw-on
Collar material	Metal
Cable composition	3 x 0.25 mm <sup>2</sup>
Cable length	1 m
Wire insulation material	PVC
Cable outer diameter	4.6 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.07 kg

### Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

### Packing Units

Package 1 Weight	0.054 kg
Package 1 Height	0.150 dm
Package 1 width	1.800 dm
Package 1 Length	2.000 dm

### Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>

## Contractual warranty

---


Warranty	18 months
----------	-----------

---

---

Dimensions

---

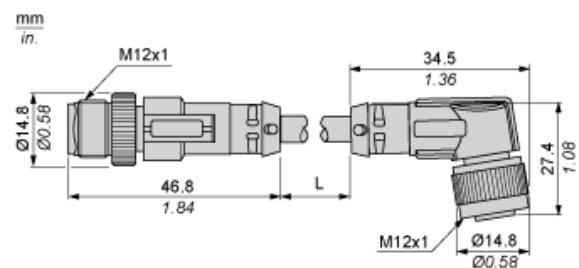

L : Length of cable

---

Connections and Schemes

---

