

Product data sheet

Characteristics

XZCRV2605V2X2

jumper cable XZ - male straight M8 4 pin - female straight M8 3 pin - PVC 2m



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M8 male 4 pins straight connector with screw-on
Jumper cable end 2	M8 female 3 pins straight connector with screw-on
Collar material	Metal
Cable composition	3 x 0.25 mm ²
Cable length	2 m
Wire insulation material	PVC
Cable outer diameter	4.6 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.09 kg

Environment

IP degree of protection	IP65 IP67
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C


Packing Units

Package 1 Weight	0.075 kg
Package 1 Height	0.200 dm
Package 1 width	1.400 dm
Package 1 Length	1.500 dm

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes

Dimensions

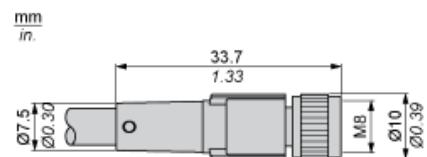

Connections and Schemes

