

# Product data sheet

## Characteristics

### XZCRV2611V3Z2

jumper cable XZ - male straight M8 4 pin - female straight M12 4 pin - PVC 2m



#### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

#### Complementary

Jumper cable end 1	M8 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins straight connector with screw-on
Collar material	Metal
Cable composition	5 x 0.25 mm <sup>2</sup>
Cable length	2 m
Wire insulation material	PVC
Cable outer diameter	5.2 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MΩ
Maximum resistance across terminals	5000 mΩ
Net weight	0.1 kg

#### Environment

IP degree of protection	IP65 IP67
Product certifications	CULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

#### Packing Units

Package 1 Weight	0.091 kg
Package 1 Height	0.200 dm
Package 1 width	1.500 dm
Package 1 Length	1.600 dm


#### Offer Sustainability

REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>

---

Dimensions

---

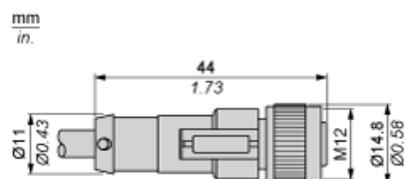

---

Connections and Schemes

---

M8 and M12

