

# Connection Cable

M12 × 1; 12-pin - M12 × 1, 4-pin

## ZDCV005

Part Number





### Technical Data

Electrical Data	
Supply Voltage	≤ 30 V DC
Mechanical Data	
Connection 1	Socket, angled
Connection mode 1	M12 × 1, 12-pin
Connection 2	Plug, straight
Connection mode 2	M12 × 1, 4-pin
Torque	M12: 0,6 Nm
Cable Length	3,5 m
Outside diameter (d)	5 mm
Wire cross-section	0,25 mm <sup>2</sup>
Degree of Protection	IP67
Jacket color	gray
Cable Jacket Material	PUR
Material Wire Insulation	TPE
Material Sleeve Nut	CuZn, nickel-plated
Screened	yes
Halogen-free	yes
Drag Chain Suitable	yes
Bending radius (fixed installation)	> 5 × d
Bending radius (used in motion)	> 7,5 × d
Bending cycles	≤ 2000000
Packaging unit	1 Piece

Connection Diagram No.

**S115**

- Drag chain suitable
- Screened

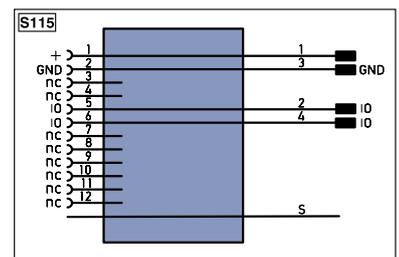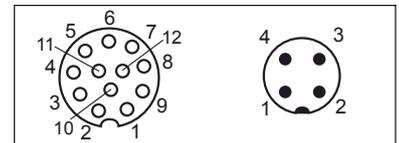

\* per contact

Legend			
+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ü	Test Input inverted
Ä	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
∇	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	Awv	Valve Output
S	Shielding	a	Valve Control Output +
RxD	Interface Receive Path	b	Valve Control Output 0 V
TxD	Interface Send Path	SY	Synchronization
RDY	Ready	SY-	Ground for the Synchronization
GND	Ground	E+	Receiver-Line
CL	Clock	S+	Emitter-Line
E/A	Output/Input programmable	±	Grounding
	IO-Link	SrR	Switching Distance Reduction
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path
IN	Safety Input	Tx+/-	Ethernet Send Path
OSSD	Safety Output	BuB	Interfaces-Bus A(+)/B(-)
Signal	Signal Output	La	Emitted Light disengageable
Bl-D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation
EN0puls2	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation
		EDM	Contactors Monitoring
		ENAs42z	Encoder A/A (TTL)
		ENB42z	Encoder B/B (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		ACK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		Out	Brightness output
		M	Maintenance
		rsv	reserved
		Wire Colors according to IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Specifications are subject to change without notice