




CUSCINETTI A SFERE SIGILLATI - SEALED BALL BEARINGS

CB2 Serie leggera - Light duty

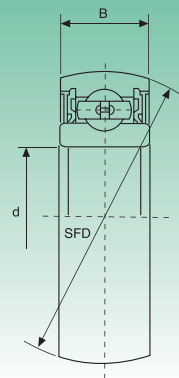


Tipo Type	Dimensioni - Dimensions			Coefficienti di carico (N) Load ratings (N)		Peso Weight
	d	D	B	Dinamico C Dynamic C	Statico C ₀ Static C ₀	
	mm/inch					kg
CB200	10	30	9			
CB200	0,3937	1,1811	0,3543	3750	2150	0,030
CB201	12	32	10			
CB201	0,4724	1,2598	0,3937	4500	2500	0,035
CB202	15	35	11			
CB202	0,5906	1,3780	0,4331	5650	3300	0,040
CB203	17	40	12			
CB203	0,6693	1,5748	0,4724	7000	4480	0,06
CB204	20	47	14			
CB204	0,7874	1,8504	0,5512	9880	6200	0,10
CB205	25	52	15			
CB205	0,9843	2,0472	0,5906	10780	6980	0,13
CB206	30	62	16			
CB206	1,1811	2,4409	0,6299	14970	10040	0,20
CB207	35	72	17			
CB207	1,3780	2,8346	0,6693	19750	13670	0,29
CB208	40	80	18			
CB208	1,5748	3,1496	0,7087	22710	15940	0,37
CB209	45	85	19			
CB209	1,7717	3,3465	0,7480	24360	17710	0,46
CB210	50	90	20			
CB210	1,9685	3,5433	0,7874	26980	19840	0,57
CB211	55	100	21			
CB211	2,1654	3,9370	0,8268	28500	21850	0,62
CB212	60	110	22			
CB212	2.3622	4.3307	0.8661	31700	24500	0,80

Equivalente serie 62... bombato ISB® - Equivalent 62... spherical ISB®



CUSCINETTI CON GRANI - BEARINGS WITH SET SCREWS

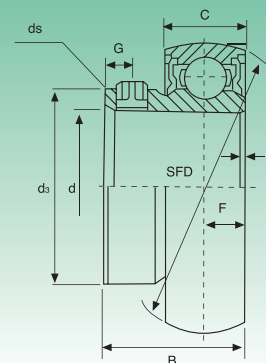

Tipo Type	Dimensioni - Dimensions									Coefficienti di carico (N) Load ratings (N)		Peso Weight
	d	D	B	C	d _s	F	G	r	d _s	Dinamico C Dynamic C	Statico C ₀ Static C ₀	
	mm/inch											
U000	10	26	14	8	14,75	4	3	0,5				
U000	0,3937	1,024	0,5512	0,3150	0,5807	1,1575	0,1181	0,0197	M3	4700	2000	0,023
U001	12	28	14,5	8	17,35	4	3	0,5				
U001	0,4724	1,1024	0,5709	0,3150	0,6831	1,1575	0,1181	0,0197	M3	5200	2450	0,027
U002	15	32	16,5	9	20,02	4,5	3,5	0,5				
U002	0,5906	1,2598	0,6496	0,3543	0,7882	0,1772	0,1378	0,0197	M4	5700	2900	0,045
U003	17	35	17,5	10	23,10	5	3,5	0,5				
U003	0,6693	1,3780	0,6890	0,3937	0,9094	0,1969	0,1378	0,0197	M4	6100	3350	0,050
U004	20	42	21	12	27,00	6	4	1				
U004	0,7874	1,6535	0,8268	0,4724	1,0630	0,2362	1,1575	0,0394	M5	9550	5150	0,086
U005	25	47	22,5	12	31,70	6	4,5	1				
U005	0,9843	1,8504	0,8858	0,4724	1,2480	0,2362	0,1772	0,0394	M5	10300	5950	0,100
U006	30	55	24,5	13	38,00	6,5	5	1,5				
U006	1,1811	2,1654	0,9646	0,5118	1,4961	0,2559	0,1969	0,0591	M5	13500	8450	0,145

Disponibile su richiesta in acciaio inox: AISI 440C o 420C - Available under request stainless steel: AISI 440C or 420C