

Technical data sheet

Connection cable

Part no.: 50111226

KB M12A-8P-PC-IO-3000

Contents

- Technical data
- Electrical connection

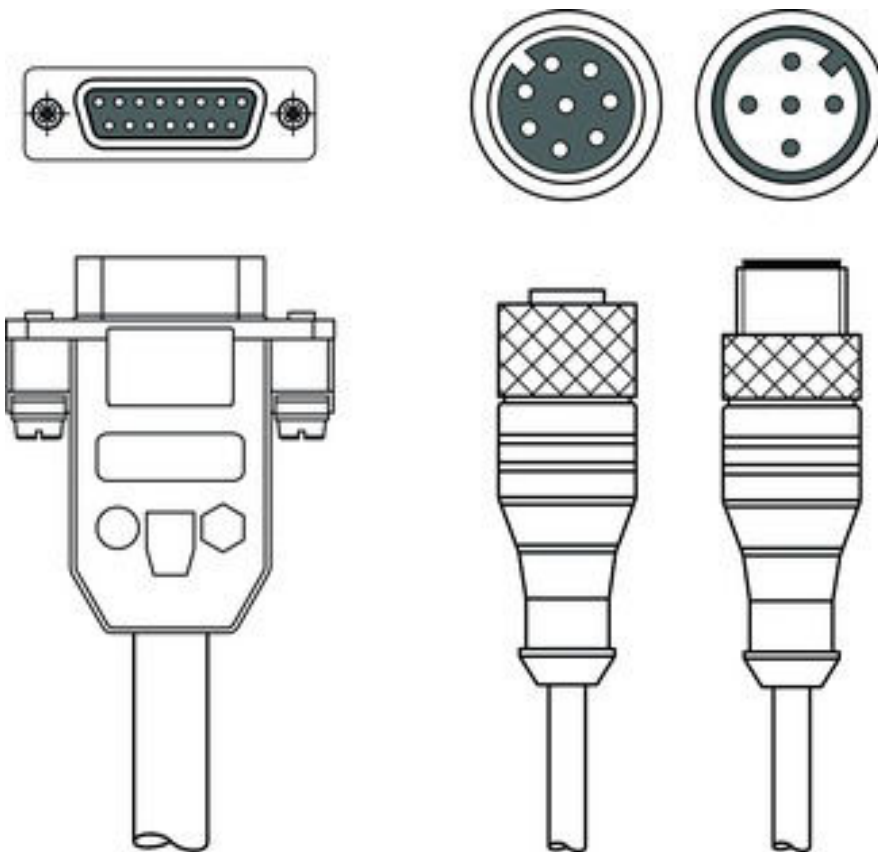


Figure can vary

Technical data

Basic data

Suitable for	LSIS 222 series stationary 2D-code readers
Suitable for interface	RS 232

Connection

Connection 1

Type of connection	Sub-D
Type	Female
No. of pins	9 -pin
Version	Axial

Connection 2

Type of connection	Connector
Thread size	M12
Type	Female
No. of pins	8 -pin
Encoding	A-coded
Version	Axial

Connection 3

Type of connection	Connector
Thread size	M12
Type	Male
No. of pins	5 -pin
Encoding	A-coded
Version	Axial

Cable properties

Number of conductors	8 Piece(s)
Sheathing color	Black
Shielded	Yes
Cable design	Interconnection cable
Cable diameter (external)	6 mm
Cable length	3,000 mm
Sheathing material	PUR
Suitability for drag chains	No

Classification

Customs tariff number	85444290
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311
ETIM 5.0	EC001855
ETIM 6.0	EC001855


Electrical connection

Connection 1

Type of connection	Sub-D
Type	Female
No. of pins	9 -pin
Version	Axial

Pin Pin assignment

1	n.c.
2	Data
3	Data
4	n.c.
5	GNDIN
6	n.c.
7	n.c.
8	n.c.
9	n.c.




Connection 2

Type of connection	Connector
Thread size	M12
Type	Female
No. of pins	8 -pin
Encoding	A-coded
Version	Axial

Electrical connection

Pin	Pin assignment
1	VIN
2	SWIN
3	GNDIN
4	SW OUT
5	n.c.
6	Data
7	Data
8	FE



Connection 3

Type of connection	Connector
Thread size	M12
Type	Male
No. of pins	5 -pin
Encoding	A-coded
Version	Axial

Pin	Pin assignment
1	VIN
2	SWIN
3	GNDIN
4	SW OUT
5	n.c.

