

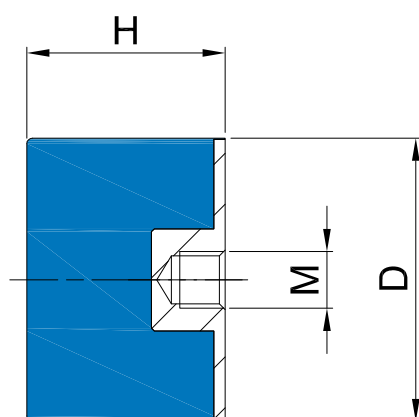
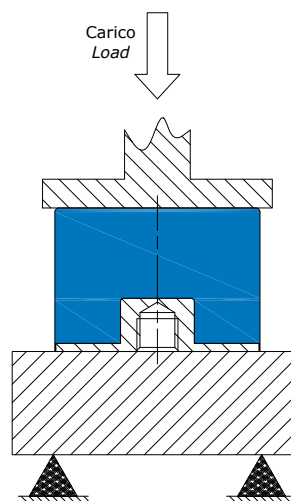
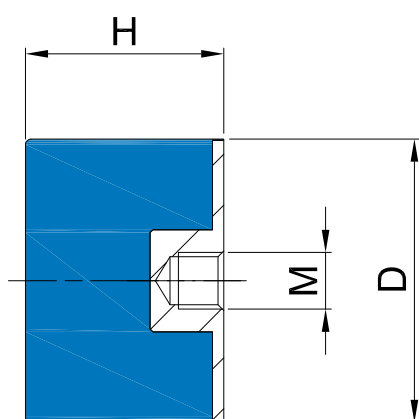




Codice	D	H	M	Rigidezza 45 IRHD (daN/mm)	Rigidezza 60 IRHD (daN/mm)	Rigidezza 70 IRHD (daN/mm)	Deflessione statica max. (mm)
Item	D	H	M	Stiffness 45 IRHD (daN/mm)	Stiffness 60 IRHD (daN/mm)	Stiffness 70 IRHD (daN/mm)	Max static deflection (mm)
PF161004	16	10	M4	8,1	13,3	17,9	2,0
PF161005	16	10	M5	8,1	13,3	17,9	2,0
PF161504	16	15	M4	4,3	7,7	10,8	3,0
PF161505	16	15	M5	4,3	7,7	10,8	3,0
PF162004	16	20	M4	2,4	4,4	6,1	4,0
PF162005	16	20	M5	2,4	4,4	6,1	4,0
PF201506	20	15	M6	7,0	13,3	18,4	3,0
PF202006	20	20	M6	4,0	7,5	10,4	4,0
PF202506	20	25	M6	2,9	5,5	7,7	5,0
PF203006	20	30	M6	2,0	3,7	5,2	6,0
PF251506	25	15	M6	14,0	26,9	37,7	3,0
PF251706	25	17	M6	12,1	22,6	31,4	3,4
PF252006	25	20	M6	9,8	18,1	24,5	4,0
PF252008	25	20	M8	9,8	18,1	24,5	4,0
PF252208	25	22	M8	7,9	14,5	20,0	4,4
PF252506	25	25	M6	5,5	10,3	14,3	5,0
PF252508	25	25	M8	5,5	10,3	14,3	5,0
PF253008	25	30	M8	4,0	7,6	10,0	6,0

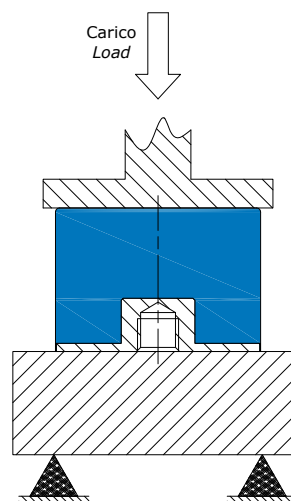



Codice	D	H	M	Rigidezza 45 IRHD (daN/mm)	Rigidezza 60 IRHD (daN/mm)	Rigidezza 70 IRHD (daN/mm)	Deflessione statica max. (mm)
Item	D	H	M	Stiffness 45 IRHD (daN/mm)	Stiffness 60 IRHD (daN/mm)	Stiffness 70 IRHD (daN/mm)	Max static deflection (mm)
PF301508	30	15	M8	18,3	34,2	47,7	3,0
PF301708	30	17	M8	14,9	29,0	39,2	3,4
PF302008	30	20	M8	11,7	19,8	30,2	4,0
PF302208	30	22	M8	9,8	18,0	24,8	4,4
PF302508	30	25	M8	6,8	12,8	16,0	5,0
PF303008	30	30	M8	5,4	10,0	13,8	6,0
PF304008	30	40	M8	4,0	7,3	10,1	8,0
PF402008	40	20	M8	24,1	45,3	62,3	4,0
PF402010	40	20	M10	24,1	45,3	62,3	4,0
PF402510	40	25	M10	16,9	31,7	43,7	5,0
PF402708	40	27	M8	14,2	26,3	36,1	5,4
PF402810	40	28	M10	13,8	25,6	35,0	5,6
PF403008	40	30	M8	12,1	22,6	31,5	6,0
PF403010	40	30	M10	12,1	22,6	31,5	6,0
PF403508	40	35	M8	9,1	17,0	23,7	7,0
PF403510	40	35	M10	9,1	17,0	23,7	7,0
PF404008	40	40	M8	6,8	14,1	19,3	8,0
PF404010	40	40	M10	6,8	14,1	19,3	8,0

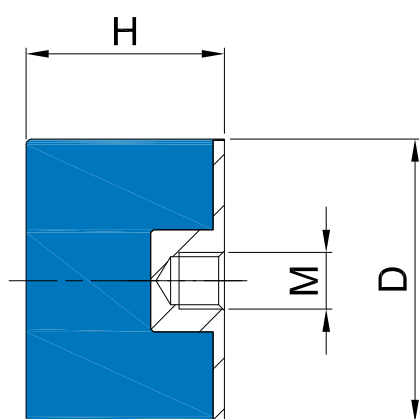

Codice	D	H	M	Rigidezza 45 IRHD (daN/mm)	Rigidezza 60 IRHD (daN/mm)	Rigidezza 70 IRHD (daN/mm)	Deflessione statica max. (mm)
Item	D	H	M	Stiffness 45 IRHD (daN/mm)	Stiffness 60 IRHD (daN/mm)	Stiffness 70 IRHD (daN/mm)	Max static deflection (mm)
PF404510	40	45	M10	6,4	12,2	16,8	9,0
PF502110	50	21	M10	53,6	100,0	137,7	4,2
PF502510	50	25	M10	37,4	69,3	95,8	5,0
PF503010	50	30	M10	25,6	47,1	65,4	6,0
PF503510	50	35	M10	18,5	34,5	47,5	7,0
PF504010	50	40	M10	13,2	24,5	33,9	8,0
PF504510	50	45	M10	10,4	19,3	26,8	z
PF505010	50	50	M10	8,5	15,8	21,9	10,0
PF582210	58	22	M10	85,3	156,7	216,5	4,4
PF602510	60	25	M10	64,0	104,1	164,4	5,0
PF603610	60	36	M10	34,4	64,0	88,0	7,2
PF603612	60	36	M12	34,4	64,0	88,0	7,2
PF604010	60	40	M10	28,1	52,2	70,9	8,0
PF604012	60	40	M12	28,1	52,2	70,9	8,0
PF604510	60	45	M10	22,4	41,6	57,6	9,0
PF604512	60	45	M12	22,4	41,6	57,6	9,0
PF605012	60	50	M12	17,9	33,1	45,7	10,0
PF605512	60	55	M12	14,7	27,1	37,3	10,0

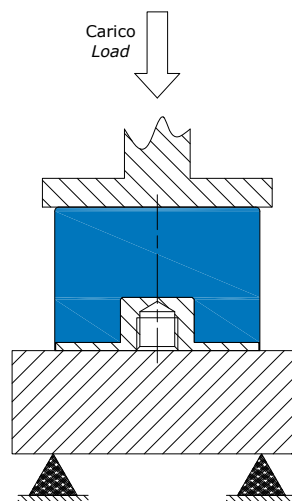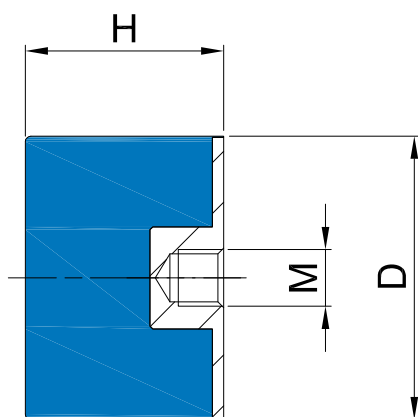

Codice	D	H	M	Rigidezza 45 IRHD (daN/mm)	Rigidezza 60 IRHD (daN/mm)	Rigidezza 70 IRHD (daN/mm)	Deflessione statica max. (mm)
Item	D	H	M	Stiffness 45 IRHD (daN/mm)	Stiffness 60 IRHD (daN/mm)	Stiffness 70 IRHD (daN/mm)	Max static deflection (mm)
PF653510	65	35	M10	40,5	75,4	104,5	7,0
PF654512	65	45	M12	23,5	43,6	60,4	9,0
PF655012	65	50	M12	18,1	33,2	46,0	10,0
PF703010	70	30	M10	66,8	124,4	169,8	6,0
PF703012	70	30	M12	66,8	124,4	169,8	6,0
PF703510	70	35	M10	48,7	96,9	133,7	7,0
PF703512	70	35	M12	48,7	96,9	133,7	7,0
PF704010	70	40	M10	38,5	71,6	99,0	8,0
PF704012	70	40	M12	38,5	71,6	99,0	8,0
PF704510	70	45	M10	30,2	56,1	75,3	9,0
PF704512	70	45	M12	30,2	56,1	75,3	9,0
PF705010	70	50	M10	24,1	45,3	62,6	10,0
PF705012	70	50	M12	24,1	45,3	62,6	10,0
PF706010	70	60	M10	19,9	36,4	50,3	12,0
PF706012	70	60	M12	19,9	36,4	50,3	12,0
PF707010	70	70	M10	16,1	29,7	40,9	14,0
PF707012	70	70	M12	16,1	29,7	40,9	14,0
PF752512	75	25	M12	109,7	208,0	286,5	5,0

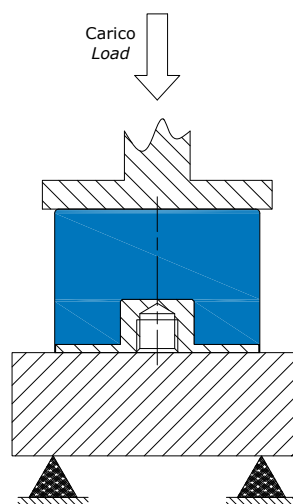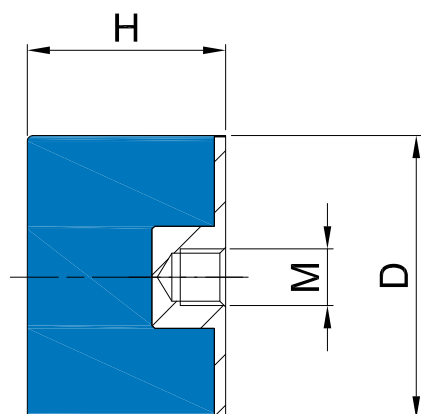

Codice	D	H	M	Rigidezza 45 IRHD (daN/mm)	Rigidezza 60 IRHD (daN/mm)	Rigidezza 70 IRHD (daN/mm)	Deflessione statica max. (mm)
Item	D	H	M	Stiffness 45 IRHD (daN/mm)	Stiffness 60 IRHD (daN/mm)	Stiffness 70 IRHD (daN/mm)	Max static deflection (mm)
PF754012	75	40	M12	41,5	93,3	114,3	8,0
PF755012	75	50	M12	30,8	57,3	79,2	10,0
PF755512	75	55	M14	24,1	45,2	62,3	11,0
PF803014	80	30	M14	106,7	201,1	276,6	6,0
PF804014	80	40	M14	56,6	105,6	146,2	8,0
PF805014	80	50	M14	37,4	70,5	97,3	10,0
PF806014	80	60	M14	25,1	47,2	64,8	12,0
PF807014	80	70	M14	19,4	36,1	49,6	14,0
PF808014	80	80	M14	15,8	29,2	40,1	16
PF1003016	100	30	M16	161,9	405,3	546,7	6
PF1004016	100	40	M16	108,9	202,1	276,3	8
PF1005016	100	50	M16	68,2	127,0	175,4	10
PF1005516	100	55	M16	57,2	108,0	146,8	11
PF1006016	100	60	M16	46,7	86,3	119,1	12
PF10010016	100	100	M16	15,9	29,4	40,5	20