

Technical data sheet

Interconnection cable

Part no.: 50122338
KB DN/CAN-10000 SBA

Contents

- Technical data
- Electrical connection

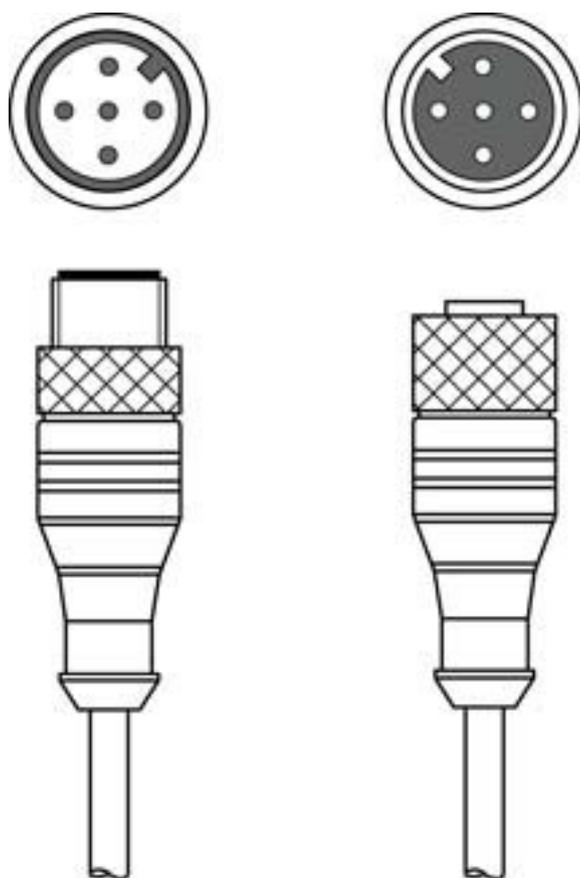


Figure can vary



Technical data

Basic data

| | |
|------------------------|-----------|
| Suitable for interface | CANopen |
| | DeviceNet |

Connection

Connection 1

| | |
|--------------------|-----------|
| Type of connection | Connector |
| Thread size | M12 |
| Type | Male |
| No. of pins | 5 -pin |
| Encoding | A-coded |
| Design | Axial |

Connection 2

| | |
|--------------------|-----------|
| Type of connection | Connector |
| Thread size | M12 |
| Type | Female |
| No. of pins | 5 -pin |
| Encoding | A-coded |
| Design | Axial |

Cable properties

| | |
|-----------------------------|---|
| Number of conductors | 5 Piece(s) |
| Sheathing color | Black |
| Shielded | Yes |
| Cable design | Interconnection cable |
| Cable diameter (external) | 7 mm |
| Cable length | 10,000 mm |
| Sheathing material | PUR |
| Suitability for drag chains | Yes |
| Traverse rate | Max. 3.3 m/s with horiz. traverse path of 5m and and max. acceleration of 5m/s ² |

Classification

| | |
|-----------------------|----------|
| Customs tariff number | 85444290 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |

Electrical connection

Connection 1

| | |
|--------------------|-----------|
| Type of connection | Connector |
| Thread size | M12 |
| Type | Male |
| No. of pins | 5 -pin |
| Encoding | A-coded |
| Design | Axial |

Connection 2

| | |
|--------------------|-----------|
| Type of connection | Connector |
| Thread size | M12 |
| Type | Female |
| No. of pins | 5 -pin |
| Encoding | A-coded |
| Design | Axial |